


UNIVERSITY || PLACE ||


EXTERIOR BUILDING IMPROVEMENTS


CONTENTS

COVER SHEET	1
PROJECT LOCATION	2
EXISTING CONDITIONS	3
PROPOSED PLAN	4
PROPOSED ELEVATION	5
PROPOSED LIGHTING PLAN	6
PROPOSED LIGHTING DETAILS	7
PERSPECTIVE VIEW - INITIAL PHASE	8
PERSPECTIVE VIEW - INITIAL PHASE	9
PERSPECTIVE VIEW - INITIAL PHASE	10
PERSPECTIVE VIEW - FULL BUILD-OUT	11
PERSPECTIVE VIEW - FULL BUILD-OUT	12
PERSPECTIVE VIEW - FULL BUILD-OUT	13

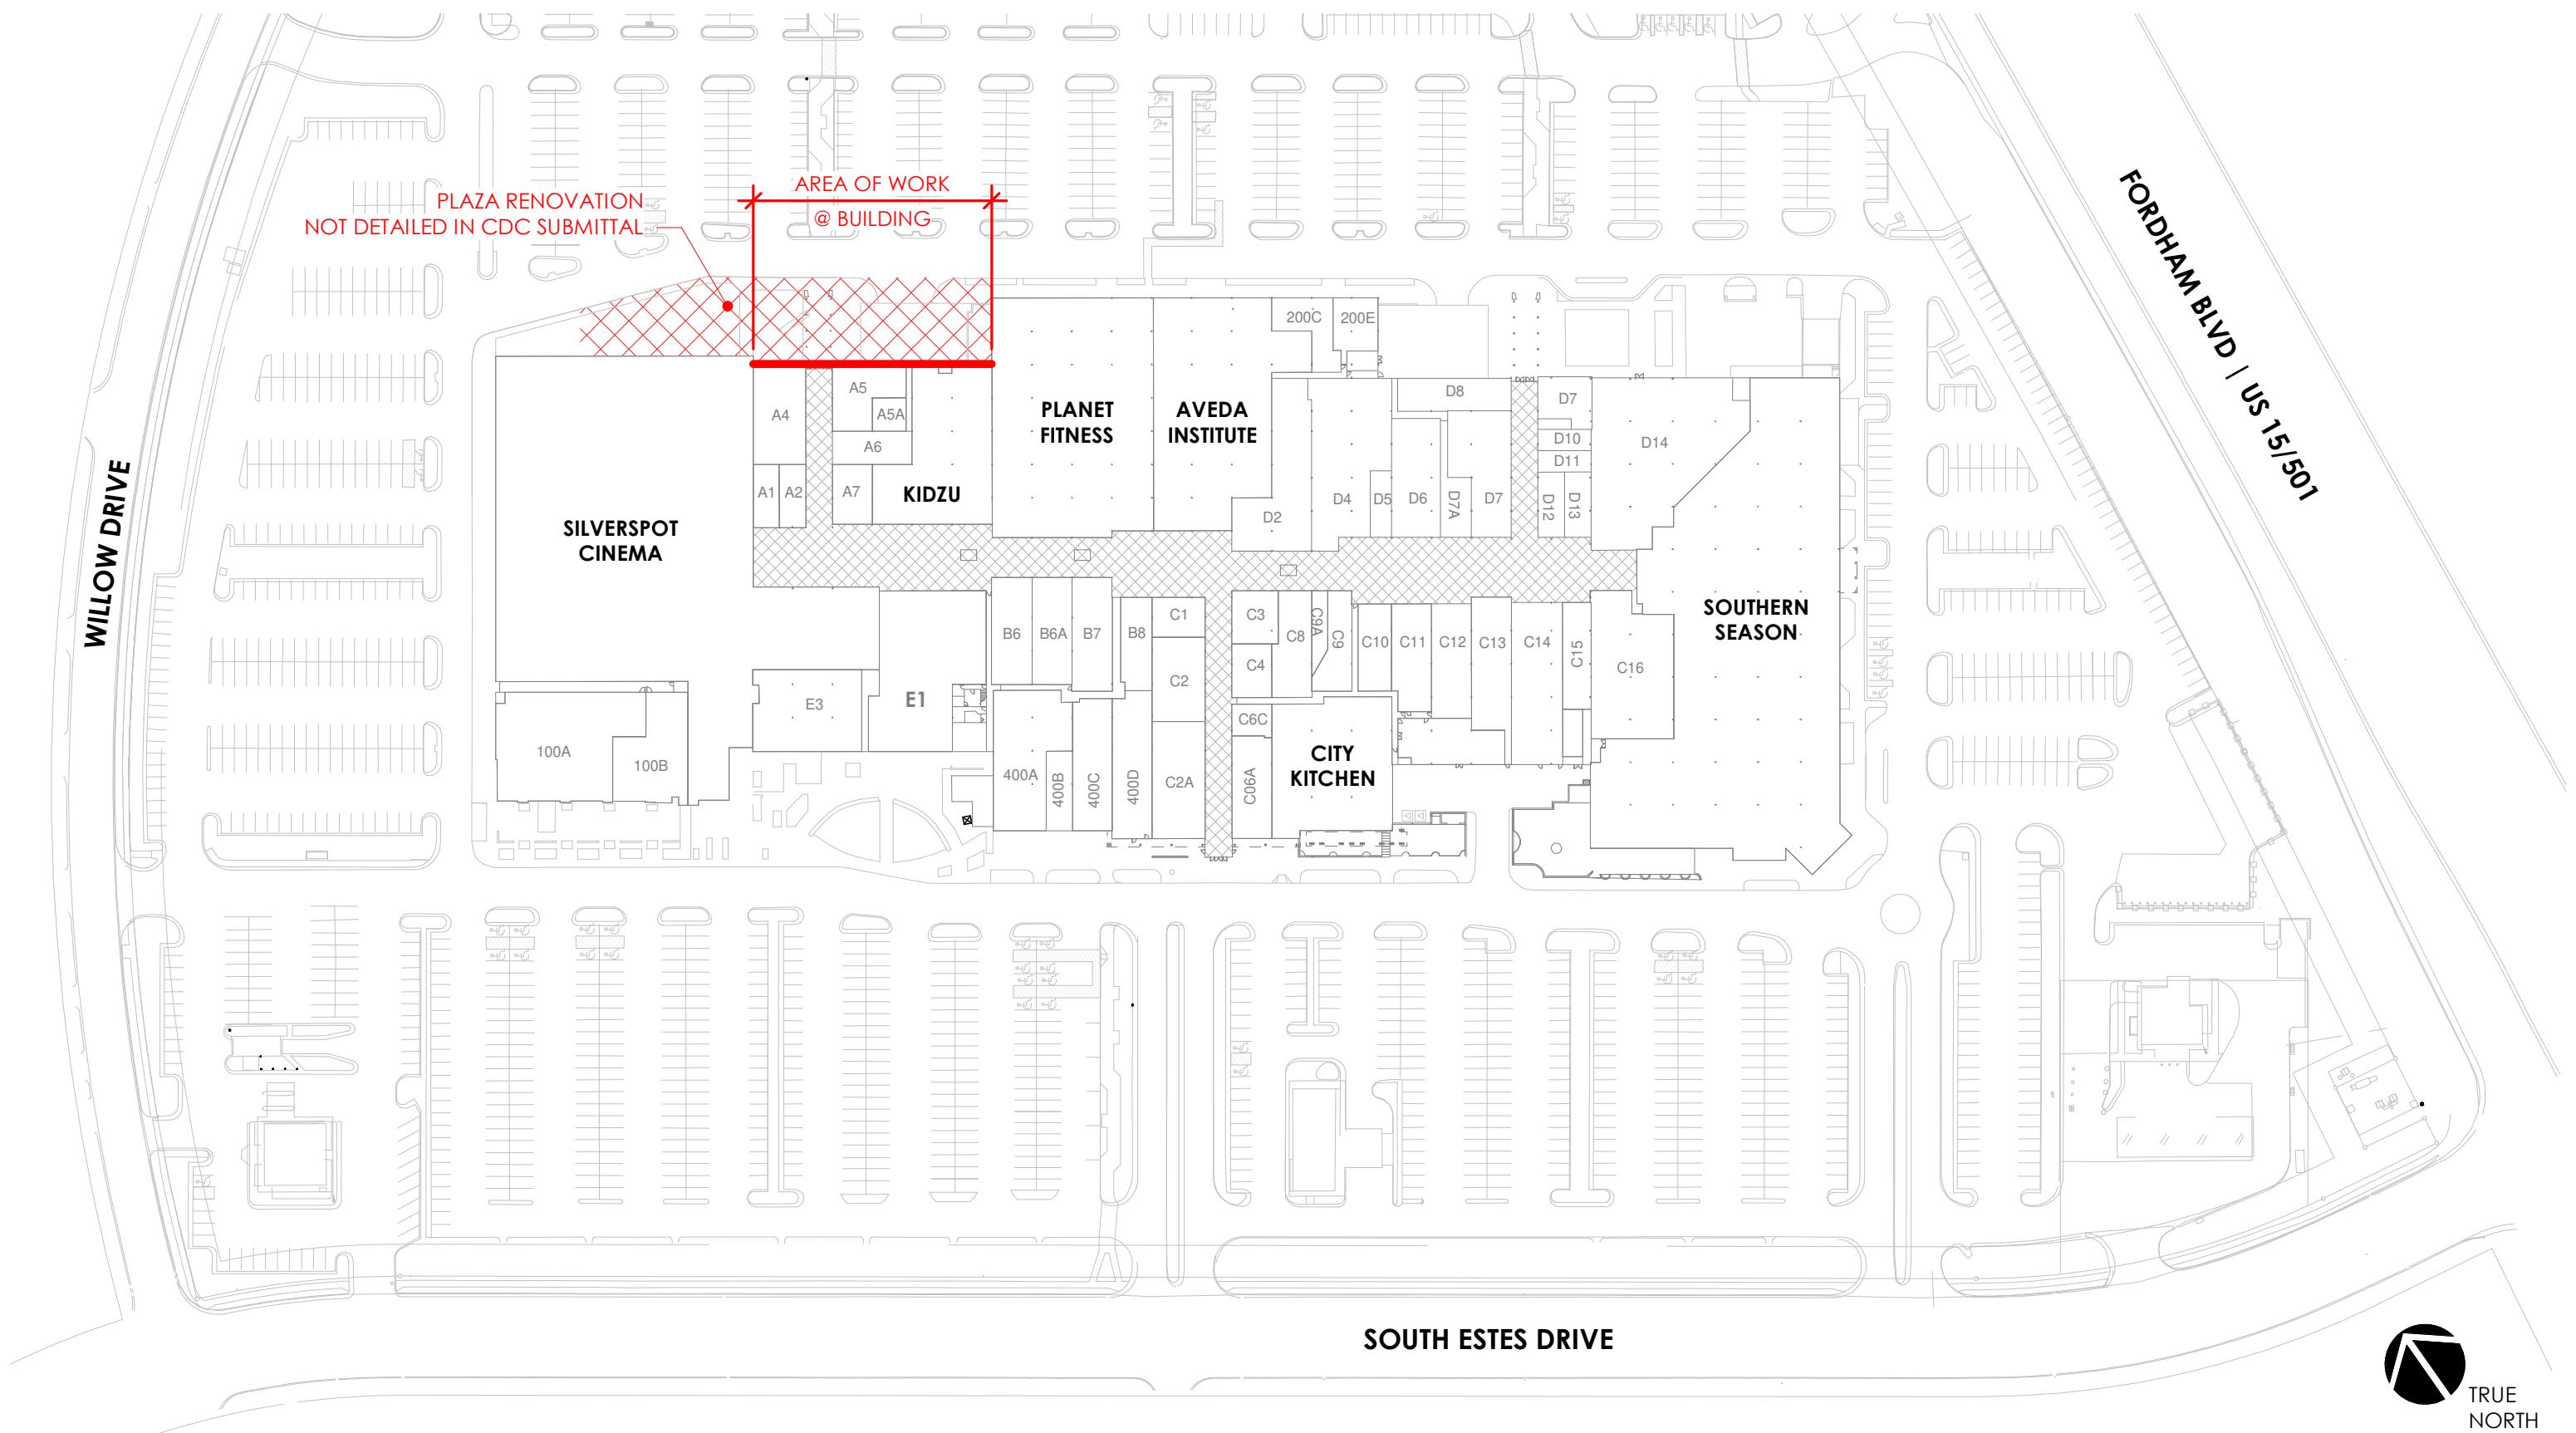



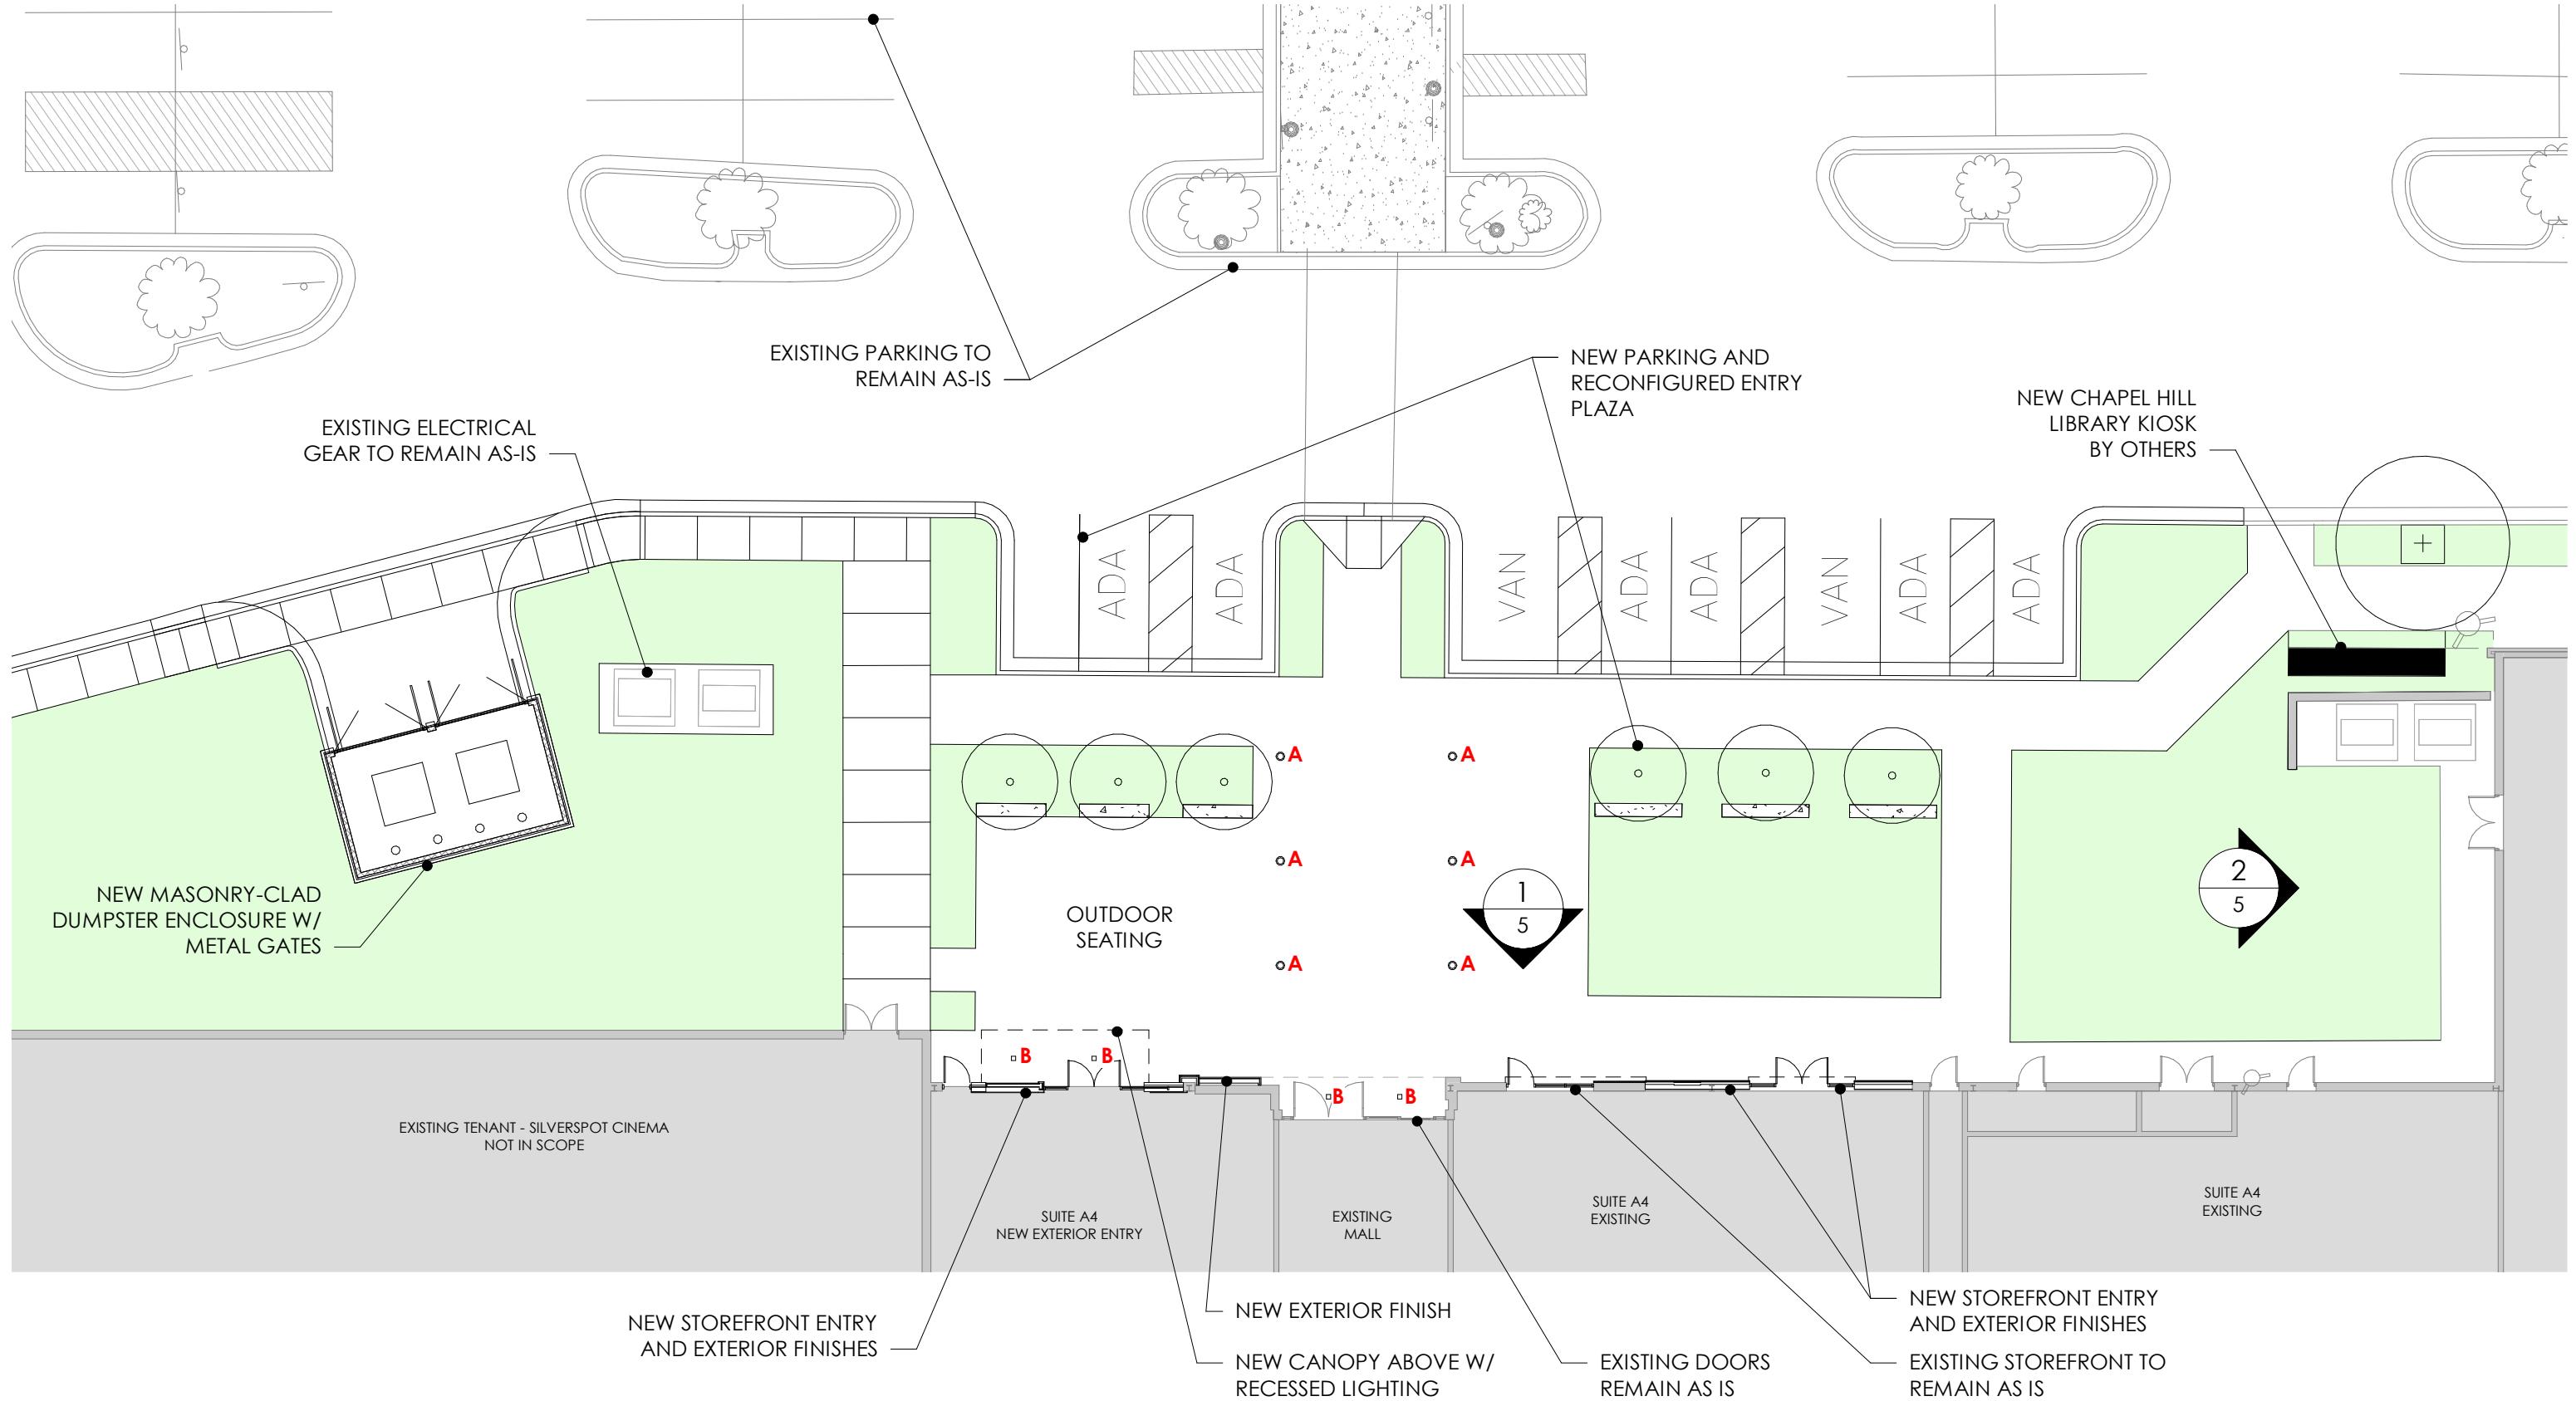

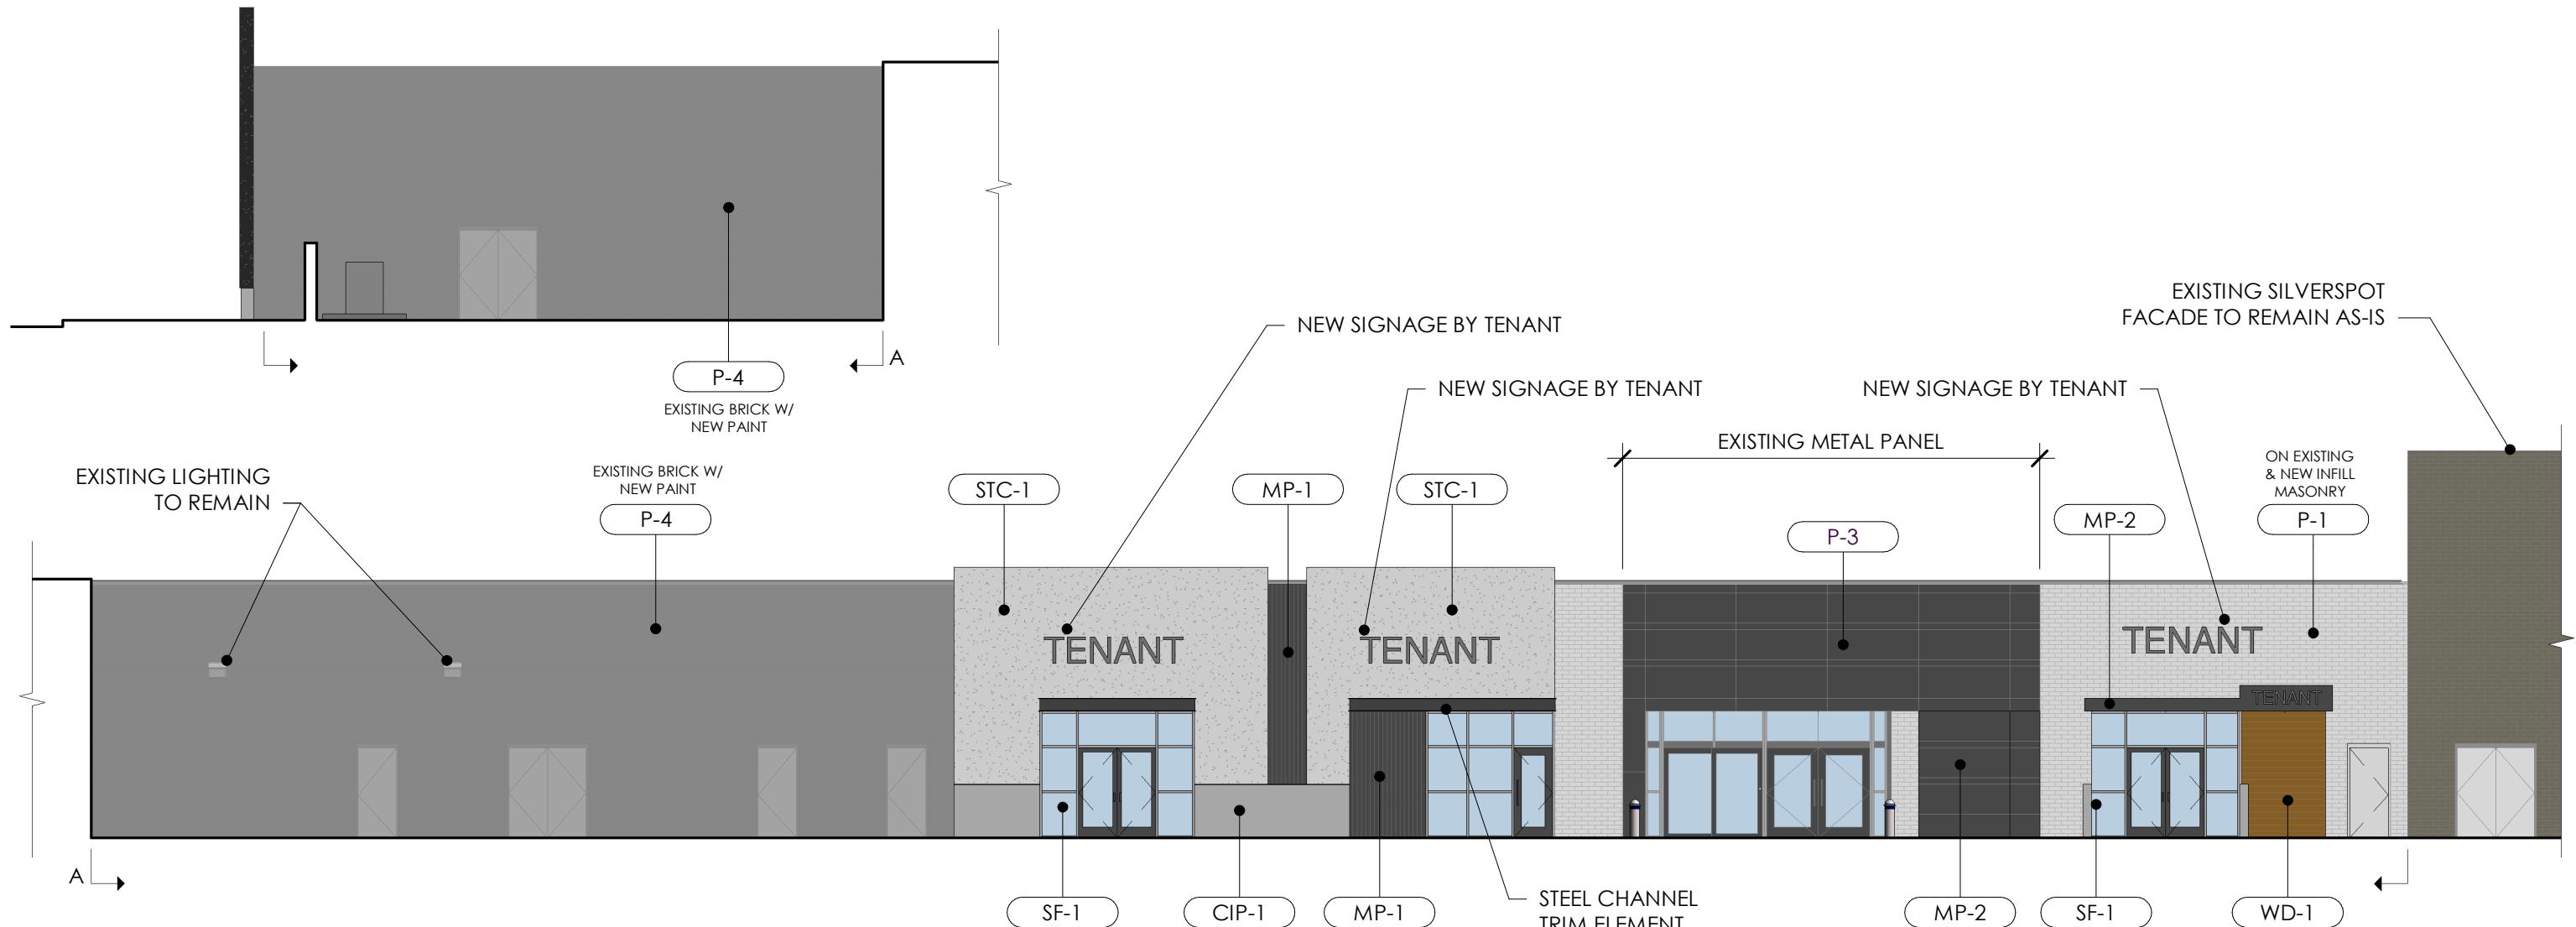

CAST IN PLACE CONCRETE

CIP-1 CLASS 2 SMOOTH FINISH

STUCCO VENEER

STC-1 STO POWERWALL, FINE FINISH
COLOR: STOCOLOR 800 COLLECTION, 37110

STOREFRONT SYSTEM

SF-1 KAWNEER 451 SERIES
CLEAR ANODIZED ALUMINUM

COMPOSITE METAL PANEL SYSTEM

MP-1 CENTRIA, IW-20A SINGLE SKIN METAL PANEL SYSTEM
COLOR: 9922 STEEL GREY

MP-2 DRI DESIGN, PAINTED ALUMINUM SYSTEM OR SIM
COLOR: P-3
NOTE: JOINT SIZE TO MATCH EXISTING SYSTEM

RUSTIC WOOD SIDING VENEER

WD-1 ROUGH SAWN CEDAR PLANK CLADDING

PAINT COLORS

P-1 BENJAMIN MOORE, PM-3 DECORATORS WHITE

P-2 BENJAMIN MOORE, 1603 GRAPHITE

P-3 BENJAMIN MOORE, MOSAIC OF SHADES BETWEEN:
1603 GRAPHITE
1602 GUNMETAL

P-4 BENJAMIN MOORE, 1601 HEARTHSTONE





LED bollard with architectural quality and strength at an affordable price point. Square post and head. Available in 12, 18 and 24 Watt versions that provide 90, 180, 270 and 360 degree lighting patterns.

Color: Bronze


Weight: 21.8 lbs

Fixture A



LDSQ6B EU6B 6LBSQ


1000, 1500, 2000, 3000, 4000, 5000,
6000, 7000 Lumens LED

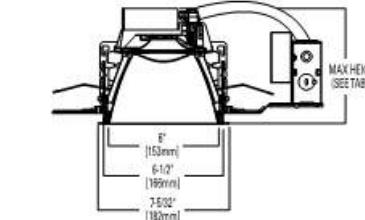

	1000-2000 LUMENS	3000-5000 LUMENS	6000-7000 LUMENS
STANDARD	6-7/16" [163mm]	6-7/16" [163mm]	8-3/16" [209mm]
SHALLOW	4-7/16" [113mm]	5-5/8" [143mm]	5-5/8" [143mm]

Fixture B

Square Downlight
New Construction

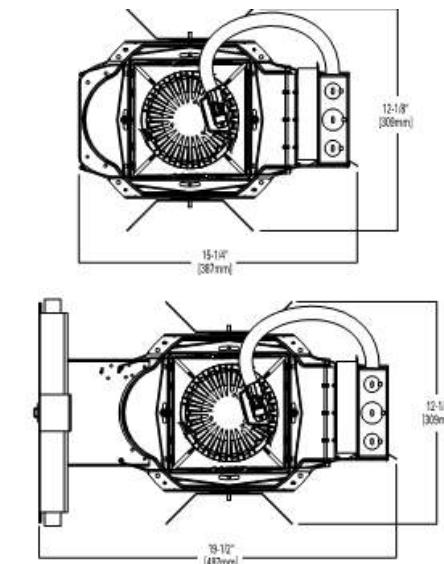

Schedule

Symbol	Label	QTY	Catalog Number	Description	Lamp	Number Lamps	Lumens per Lamp	LLF	Wattage	Polar Plot
□	A	6	BLED24N, BLED24N/D10 (42" SQUARE BOLLARD)	EXTRUDED BROWN PAINTED SQUARE METAL LOWER HOUSING, CAST METAL TOP, CAST FINNED METAL HEAT SINK WITH WHITE PAINTED INTERIOR, MOLDED SPECULAR FINISHED PLASTIC REFLECTOR WITH WHITE CORNER DIVIDERS CREATING 4 OPTICAL COMPARTMENTS, EACH OPTICAL COMPARTMENT CONTAINS 1 WHITE CIRCUIT BOARD WITH 5 LEDS, FROSTED PLASTIC LENS, CAST BROWN PAINTED METAL BOTTOM.	TWENTY LIGHT EMITTING DIODES (LEDS).	20	128	0.8	23	 Max: 1083cd
○	B	4	LDSQ6B30D010 EU6B30509040 6LBCSSQ1MMS	PORTFOLIO LD6 SERIES 6" RECESSED FIXTURE WITH A SQUARE SHALLOW CAST METALLIC SILVER TRIM MEDIUM DISTRIBUTION WITH MATTE METALLIC SILVER TRIM WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W DL3-29.67 W DLE-29.73 W	HIGH LUMEN LED 4000 K ABSOLUTE PHOTOMETRY IS BASED ON CALIBRATION FACTORS CREATED USING LAB LUMEN STANDARDS IN GONIOPHOTOMETER WITH TEST DISTANCE OF 28.75 FEET	1	2777	0.8	28	











