

Applicant: Scott Murray Land Planning, Inc.

1450 Environ Way
Chapel Hill, NC 27517
Contact: Scott Murray
252-213-9501
smurray@stmlandplan.com

Developer: Tarheel Lodging LLC and

Unicorn Group Fifteen, LLC 6110 Falcon Bridge Rd. Chapel Hill, NC 27517 Contact: Neil Kapadia

(704) 806-7615

nkapadia@rkinvestors.com

Engineering: Pennoni

401 Providence Road, Suite 200 Chapel Hill, NC 27514 Contact: Justin Brown (919) 230-9211 jbrown@pennoni.com

Architects TRU Hotel: The RBA Group

122-B West Bland Street
Charlotte, NC 28203
Contact: CHRISTOPHER BYERS, AIA
(980) 256-7640
cbyers@therbagroup.com

Architects Building 2 Office: JDavis

510 S. Wilmington ST. Raleigh, NC 27601

Contact: Chris Hall - chrish@jdavisarchitects.com

919-835-1500

Architects Buildings 3-5 Residential: JDavis

510 S. Wilmington ST. Raleigh, NC 27601

Contact: Audrey Krenitsky or Noah Morris

audreyk@jdavisarchitects.com and noahm@jdavisarchitects.com 919-835-1500

Tarheel Lodging Redevelopment

1742 FORDHAM BLVD. | CHAPEL HILL, NORTH CAROLINA

Certificate of Appropriateness

Technical Plan Set

July 20, 2018

PIN # 9799368876, 9799460556, 9799461879

eveloper:

Tarheel Lodging, LLC and Unicorn Group Fifteen, LLC

6110 Falcon Bridge Rd. | Chapel Hill, NC 27517

Sheet Index - Civil & Site Plans

Cover Sheet C-1 Area Map Site Map & Site Photographs **Existing Conditions Map** Site Constraints & Opportunities Overall Site Plan Phases I & II CS1401 Zoning Plan Block-1 Zoning Plan Blocks 2 & 3 Lighting Plan **Lighting Details Lighting Details** CS7200 Site Sections Design Alternates 1 & 2 CS7302 Design Alternates 3a & 3b CS7203 Design Alternates 3c CS7204 Design Alternates 4 - 6

<u>Sheet Index - TRU Hotel</u>

A1 South Elevation
A2 East Elevation
A3 North Elevation
A4 West Elevation
A5 North Facade Rendering
A6 Street Patio Rendering
A7 South Facade Rendering
A8 OAS-1 Rendering
A9 Material Study South
A10 Material Study North
A11 Cross Section
A12 Main Floor Plan
A13 Typical Floor Plan
A14 Cross Site Elevation
A15 Building Dumpster and Storage

<u>Sheet Index - Building 2</u>

B2.01 Levels 1-2 Building Plan
B2.02 Level 3 Building Plan
B3.01 Elevations
B3.02 Elevations
B3.03 Section
B3.04 Design Alternate 14

C3.04 Building Sections

<u>Sheet Index - Buildings 3-5</u>

C2.01 Level 1 Building Plan
C2.02 Levels 2-5 Building Plan
C2.03 Courtyard Landscape Plan
C2.04 Level 1 Building Plan
C2.05 Level s 2-5 Building Plans
C2.06 Levels 1-4 Building Plans
C3.01 Elevations
C3.02 Elevations
C3.03 Elevations

Site Data

Overlay Zoning

 PIN
 9799460556, 9799368876, 9799461879

 Address
 1740 & 1742 Fordham Blvd.

 Existing Zoning
 WX-5 & WX-7

Ephesus Fordham/Blue Hill District

Site Area

 Net Site Area
 6.34 ac (276,170 sf)

 10% Open Space
 0.63 ac (27,617 sf)

 Total GLA
 6.97 ac (303,787 sf)

 Area in RCD Stream Buffers
 0 ac (0 sf)

Summary of Design Alternatives (DA)

DA-1: A request to approve a 550' Block Length along Street-1 (south)'.

DA-2: A request to approve a 517' Building Pass-Thru spacing along Street-1 (south).

DA-3a: A request to increase the Depth of the Build-to-Zone at the Service Drive/Novus Lane A-1 Wrap from 10' to 17'.

DA-3b: A request to approve up to 60% Amenity Space as a percentage of the Build-to-Zone Frontage requirement along Street-1 (north side).

DA-3c: A request to increase the Depth of the Build-to-Zone along Novus Lane - Block-2 from 10' to 15'.

DA-4: A request to approve 41% Build-to-Zone Frontage along Street-2 (north side).

DA-5: A request to allow reduced setback from 30' to 10' from proposed R.O.W. (north side) for the proposed parking deck.

DA-6: A request to approve a 50% Build-to-Zone Frontage along Street-2 (south side).

DA-7: A request to approve alternate building step back requirements along the Fordham Street (North)

DA-8: A request to approve alternate building step back requirements along the Hillstone Street (West)

façade. **DA-9:** A request to approve a 7% ground story transparency along the West building elevation.

Trequest to approve a 7% ground story transparency along the west building elevation.

DA-10: A request to approve a 4% upper story transparency along the West building elevation.


DA-11: A request to approve an alternate to the principal entrance location requirement

DA-12: not used


DA-13: A request to approve E.I.F.S as a primary material.

DA-14: Exception to Ground Floor Elevation Requirement



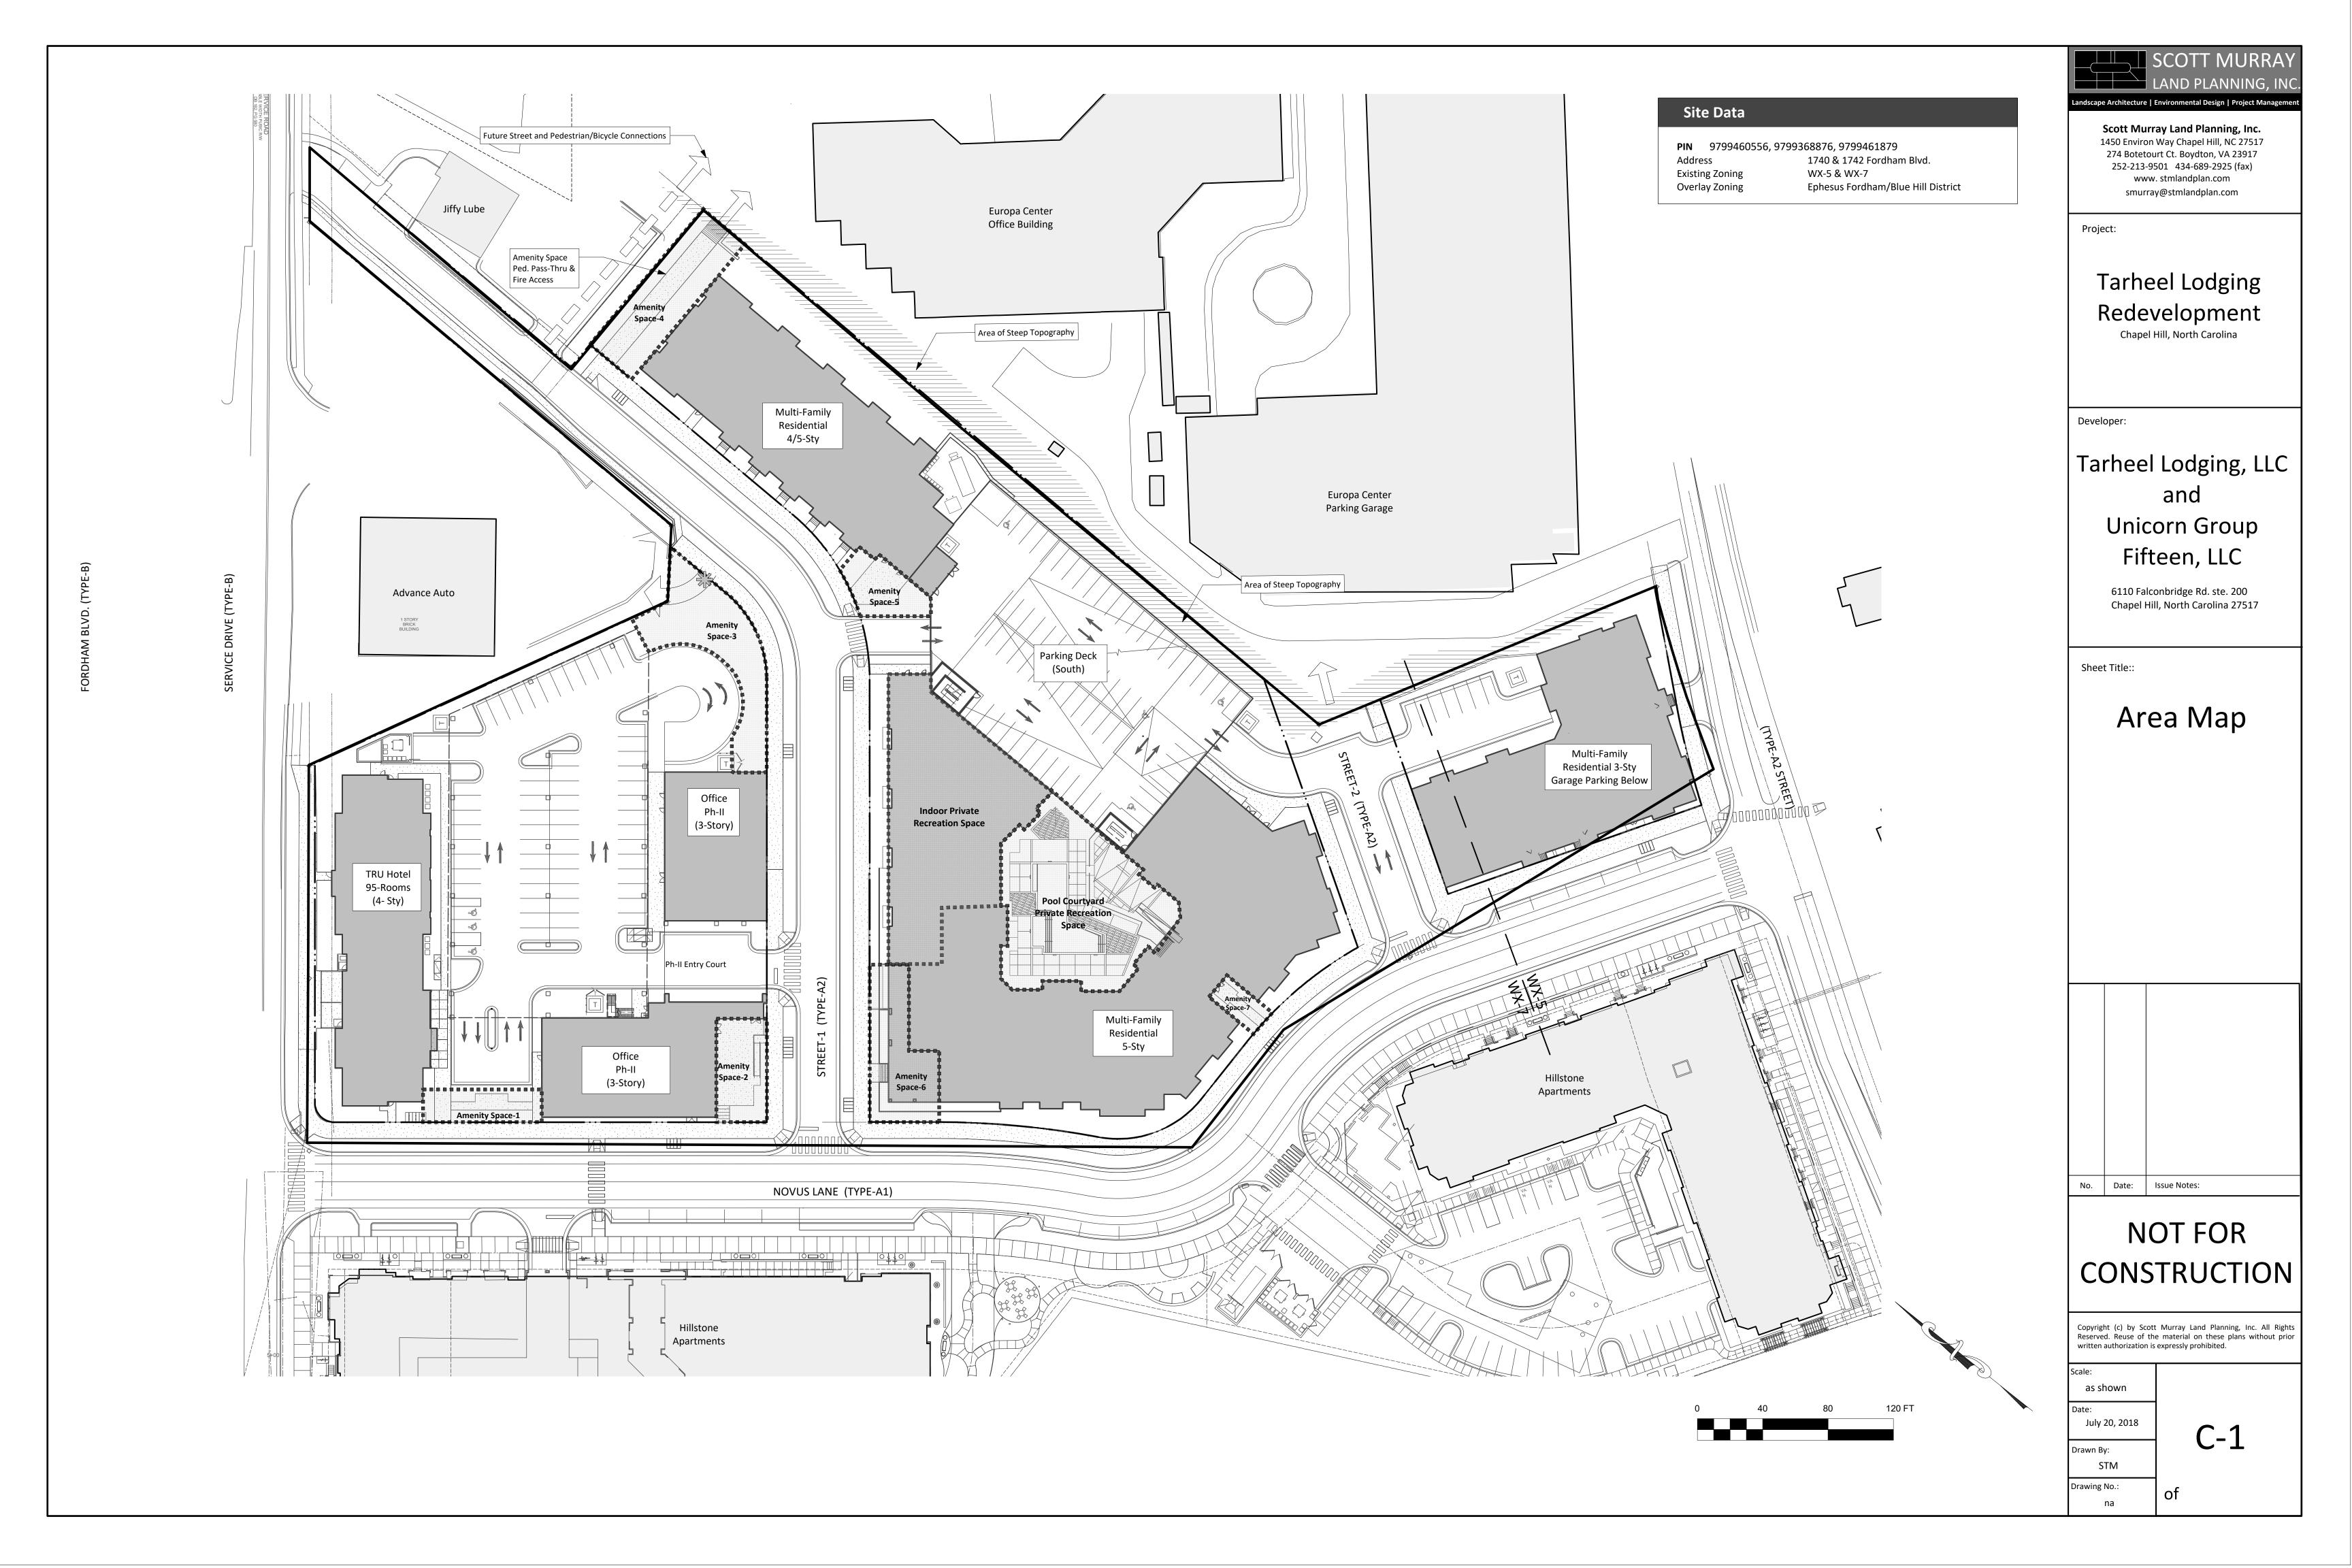



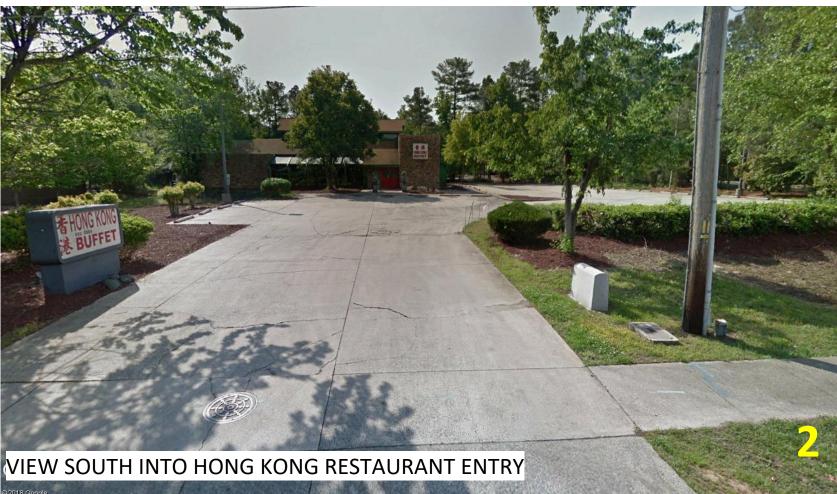










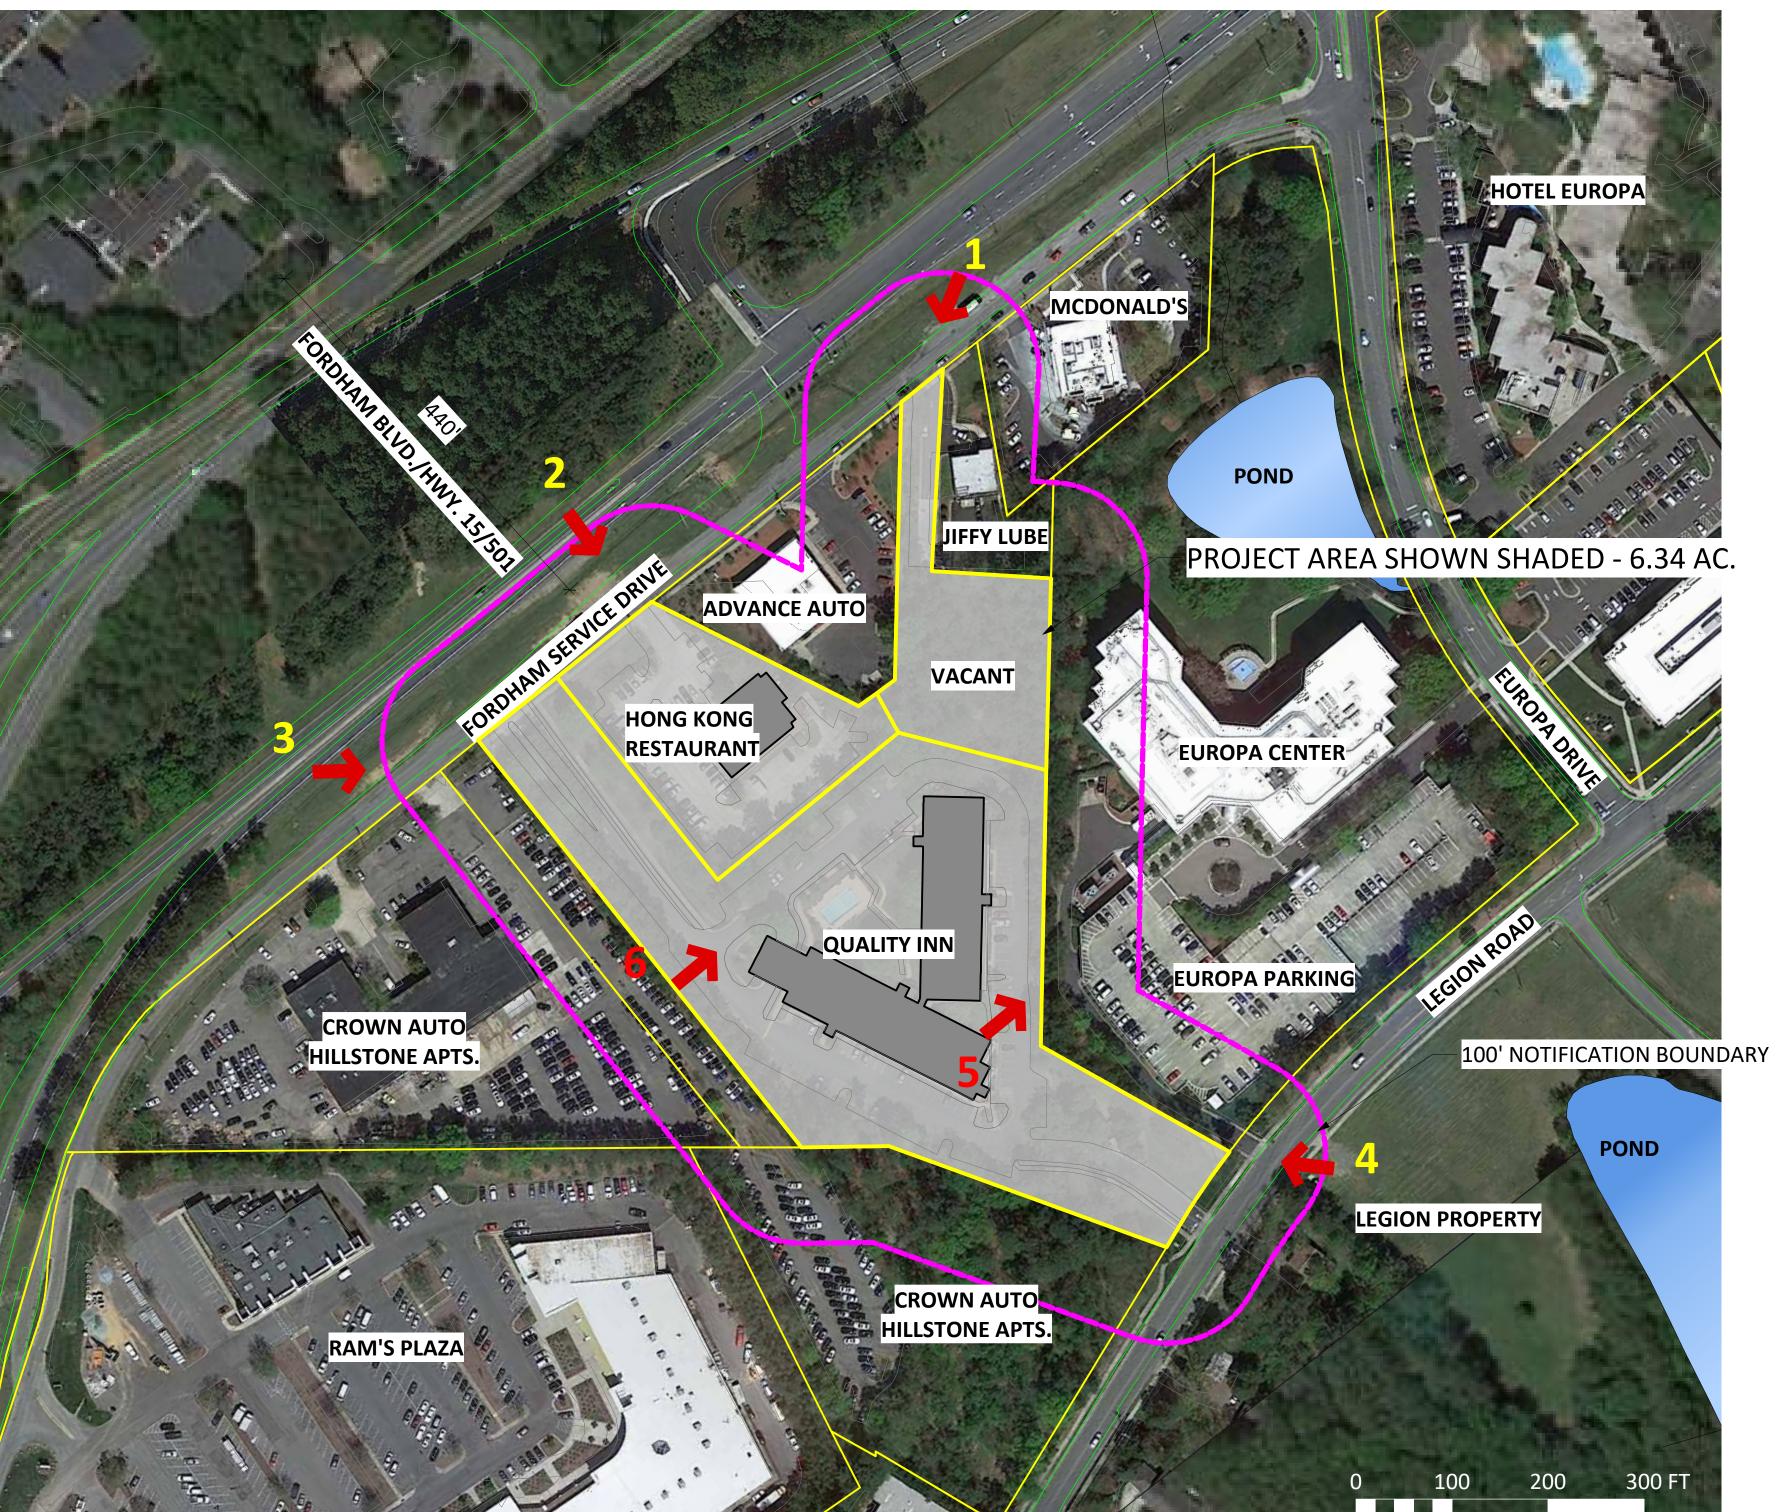



Scott Murray Land Planning, Inc. 1450 Environ Way Chapel Hill, NC 27517 274 Botetourt Ct. Boydton, VA 23917 252-213-9501 434-689-2925 (fax) www. stmlandplan.com smurray@stmlandplan.com

Project:

Tarheel Lodging Redevelopment

Chapel Hill, North Carolina

Developer:

Tarheel Lodging, LLC and Unicorn Group Fifteen, LLC

> 6110 Falconbridge Rd. ste. 200 Chapel Hill, North Carolina 27517

Sheet Title::

Site Map and Site Photographs

NOT FOR

CONSTRUCTION

No. Date: Issue Notes:

Copyright (c) by Scott Murray Land Planning, Inc. All Rights Reserved. Reuse of the material on these plans without prior written authorization is expressly prohibited.

as shown


te: Feb. 18, 2018


Drawn By:
STM

Drawing No.:

of

C-1.1

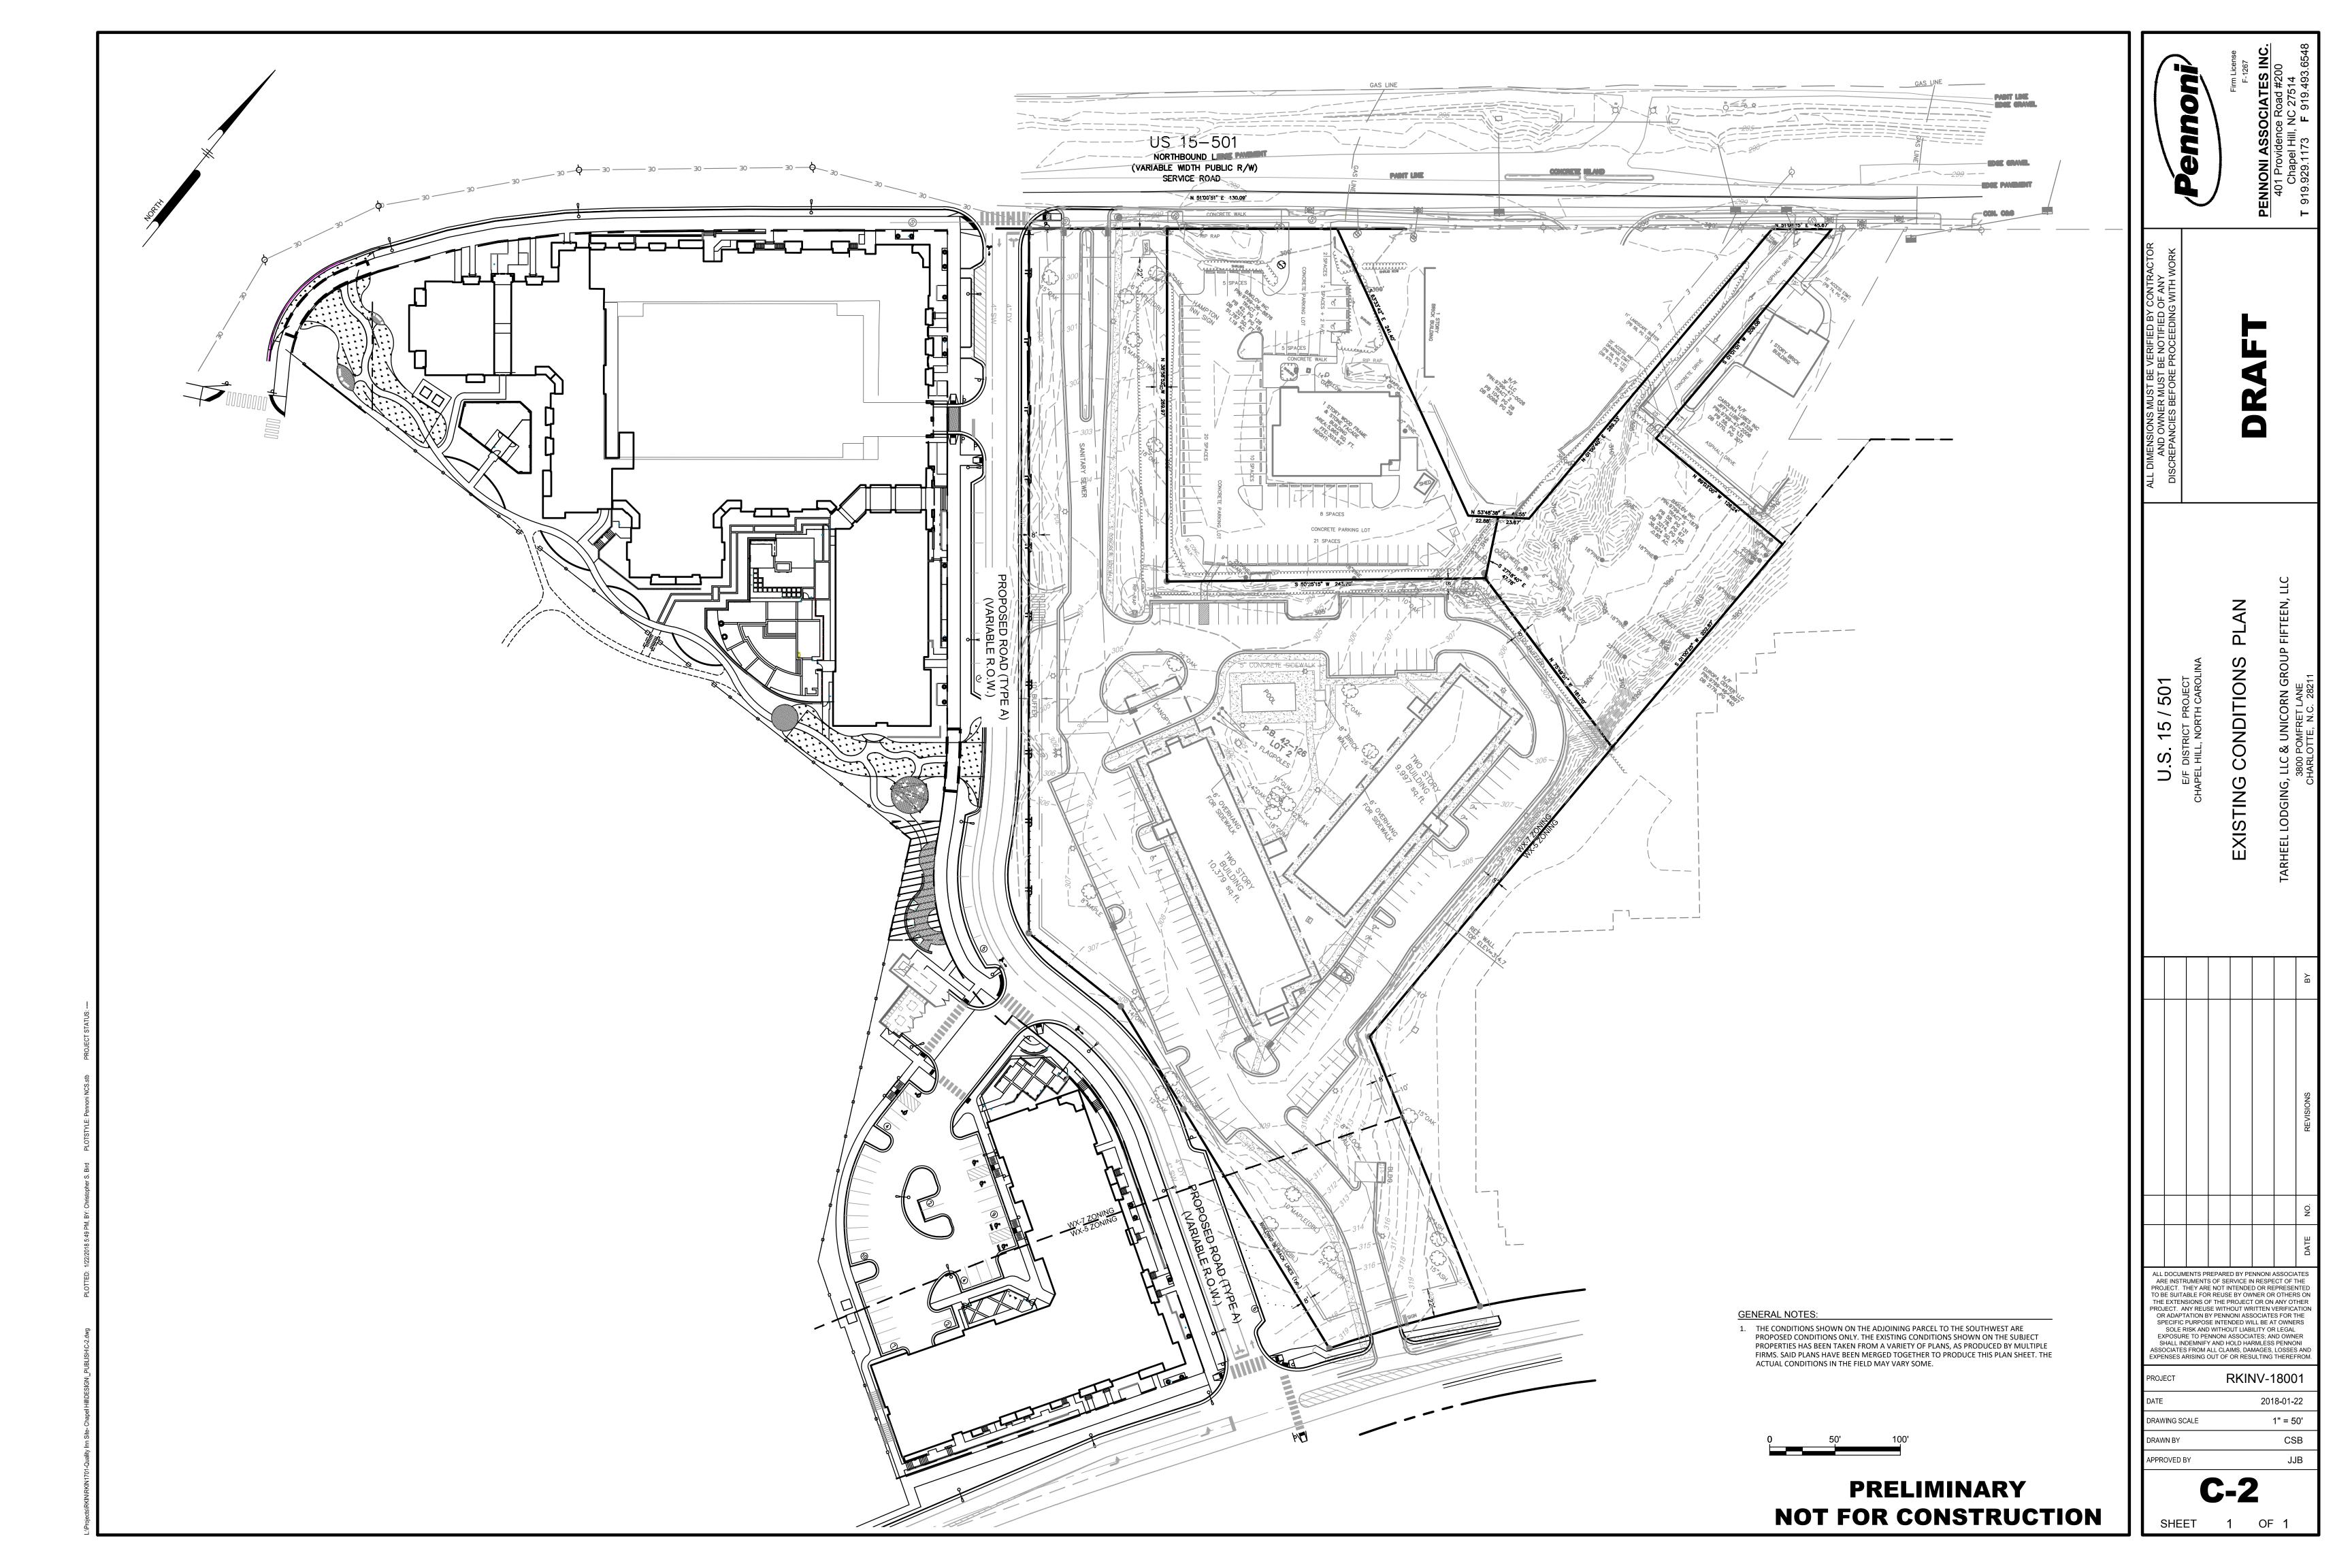

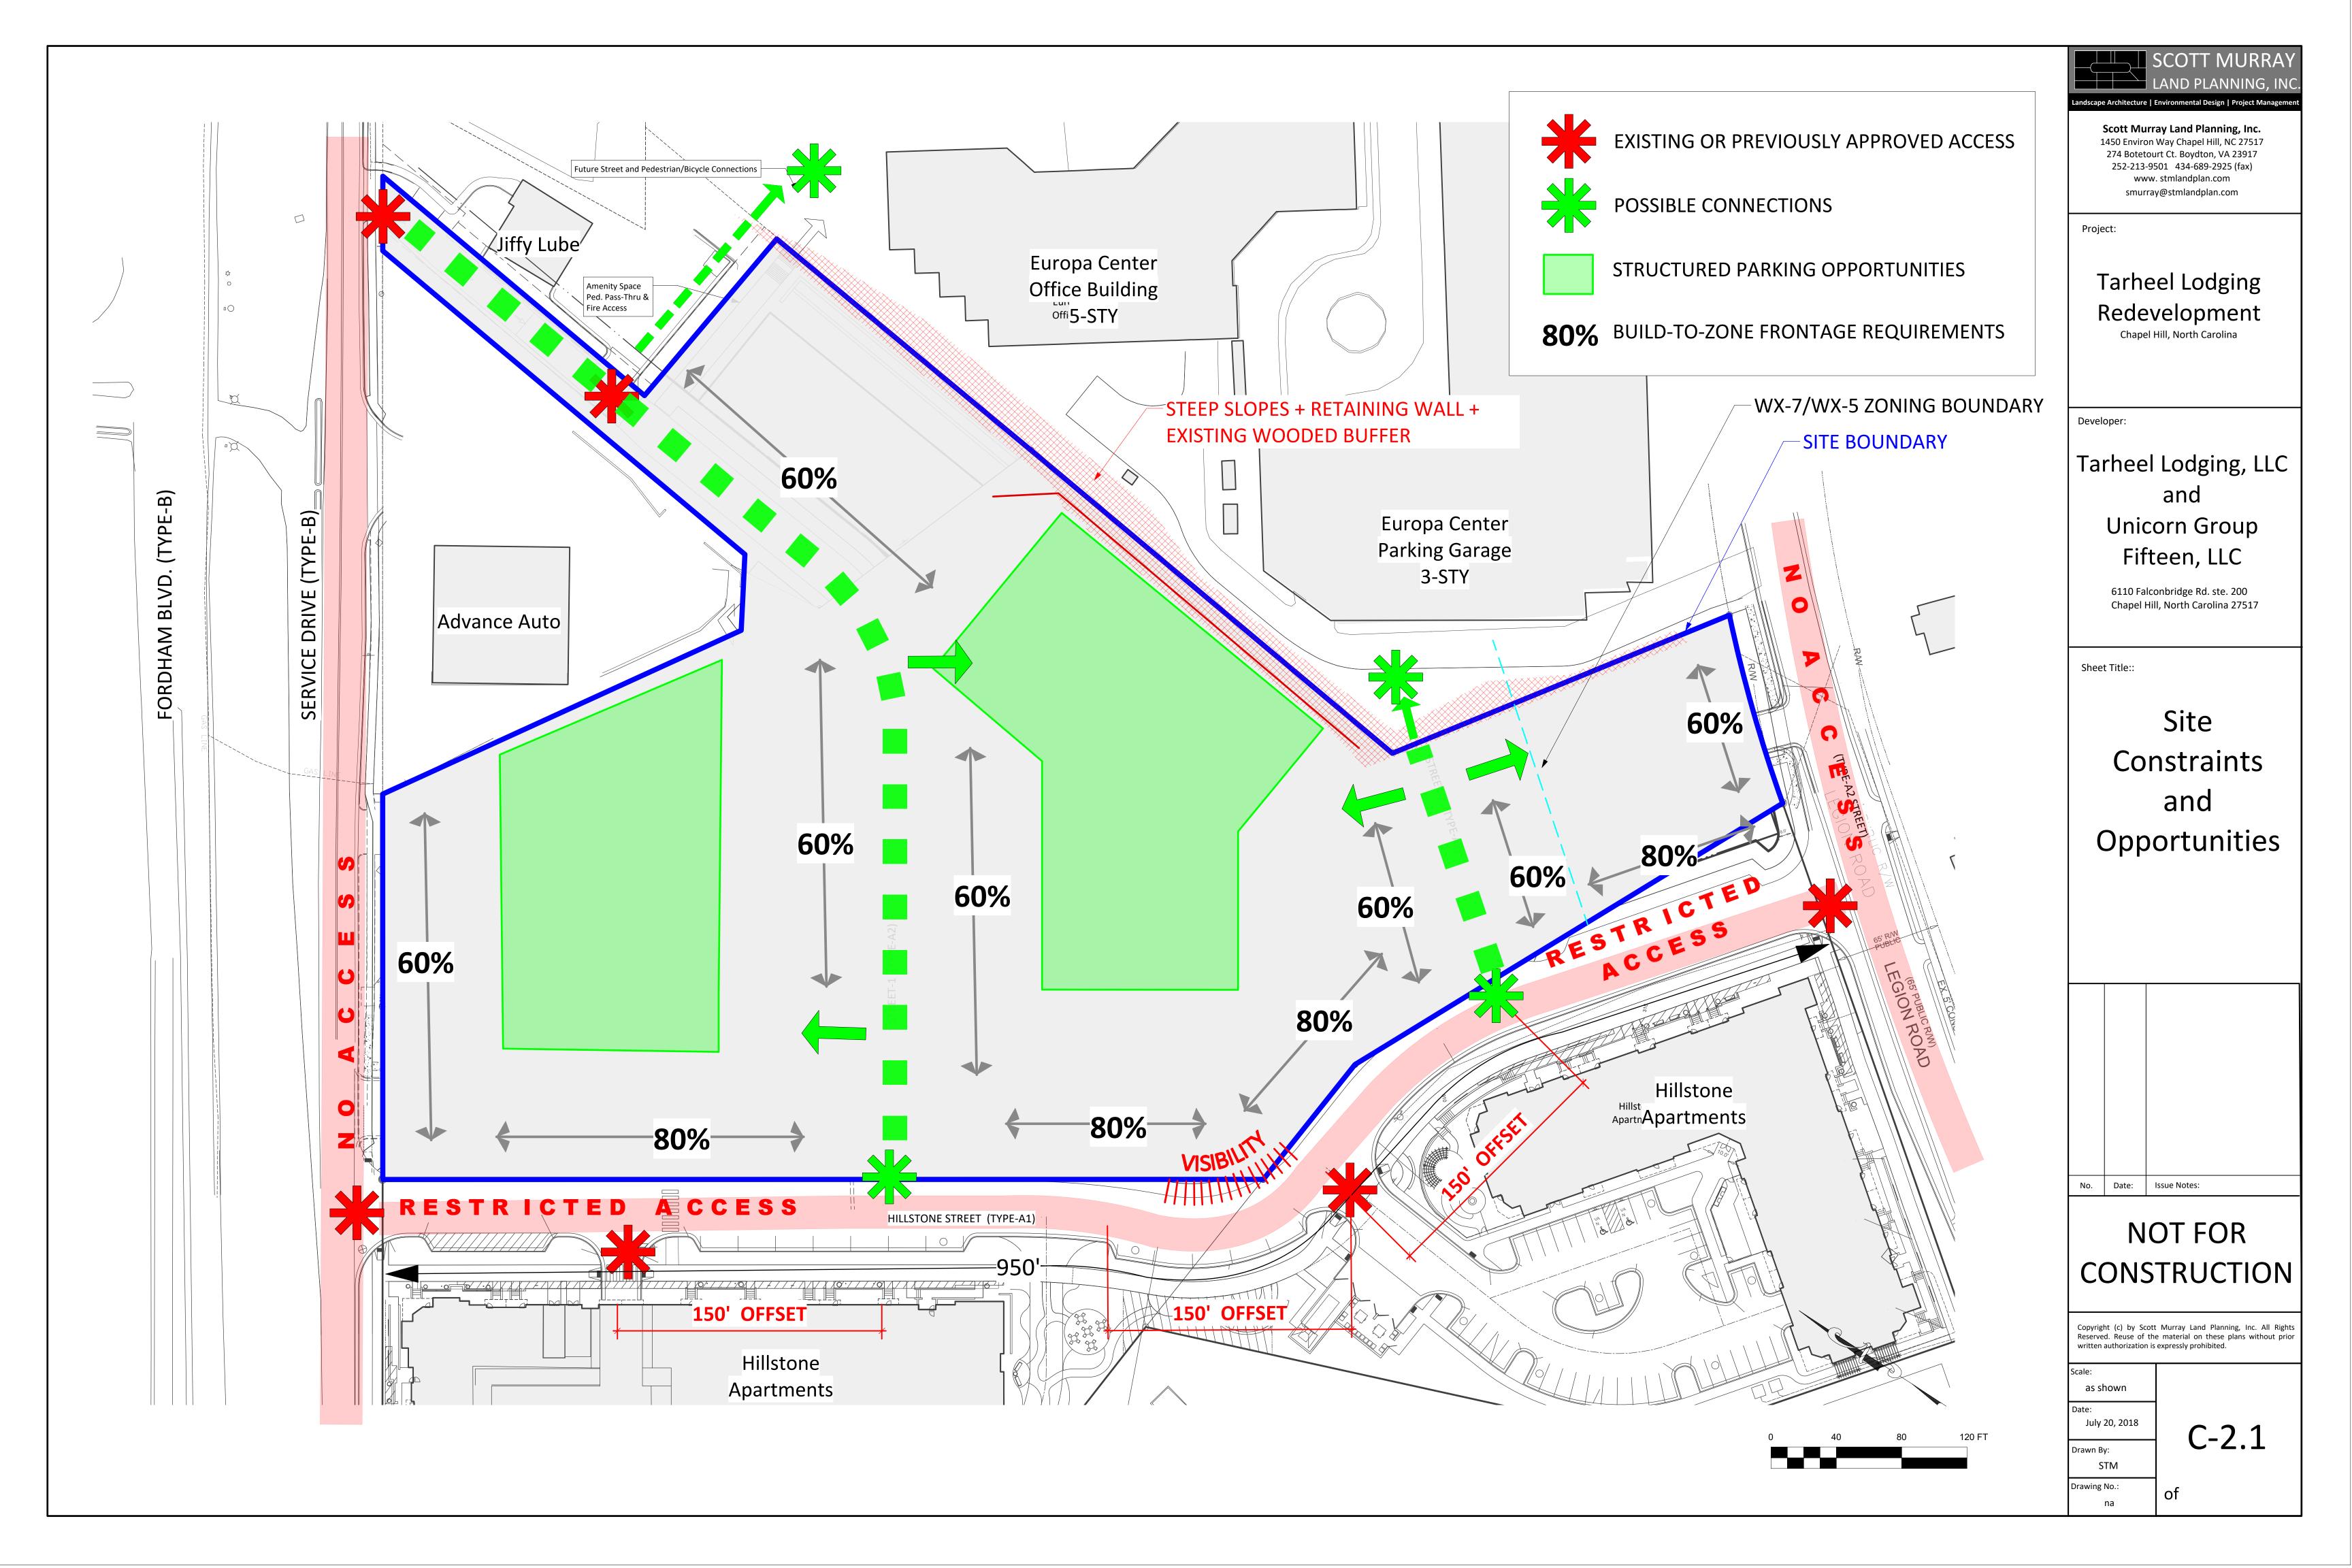

SCOTT MURRAY

General Notes

- 1. BTZ = BuildTo-Zone (10' on Type A1 Novus Lane & 20' on Type A2 and B Streets)
- 2. 10' Step Back requires a 10' stepback above 2nd or 3rd floors if building is over 3 stories
- Fire Code requires each building be accessible with 15'-30' of the face of curb along one side.
 Improvements, structures, fixtures, signs,
- tables, chairs, planters, or any other object shall not be placed in the clear area for any period of time.
 Limits of Disturbance include all areas within property boundary. See Grading Plans for off-site improvements.
 Alternate Type-A3 Street (6' Sidewalks) is Proposed In-Lieu of Type-A2 Streets Shown.

Outdoor Amenity Space Calcula	tions	
Net Site Area	6.34 ac	276,170
10% Open Space	0.63 ac	27,617
Total GLA	6.97 ac	303,787
Use		Net Land Area
All Uses		276,170
6% Outdoor Amenity Space Required		16,570
Outdoor Amenity Space (OAS) Provided (depth x width nominal dimensions)		16,232
OAS-1 (20' x 72.7') - Phase - I	1,454 sf	
OAS-2 (31' x 63') - Phase - II	1,953 sf	
OAS-3 (20' x 156') - Phase - II	4,046 sf	
OAS-4 (109' x 33') Phase - II	3,597 sf	
OAS-5 (45'+ x 45') Phase - II	1,470 sf	
OAS-6 (24'+ x 96') Phase - II	3,117 sf	
OAS-7 (17' x 35') Phase-II	595 sf	
Outdoor Amenity Space Payment In-Lieu (approx)	-338

0 sf								Bicycle	
7 sf			Vehicle Parking	Vehicle			Min. Bicycle	Parking	
7 sf	Land Use Summary	Floor Area/Units	Required Min/Max	Parking Provided	Vehicle Parking Ratio	Bicycle Parking Reqd.	Parking Provided	Provided ST/LT	Notes
	Hotel - TRU (43,040 sf)	97 Rooms	87/121 sp	87 sp	.9 sp/key	1 sp/15 units	6 sp	6 sp/2 sp	4-Sty Note-
ea	Commercial /Office	42,455 sf	142/212 sp	142 sp	1 sp/300 sf	1 sp/2,500 sf	17 sp	14/4 sp	Note-2
0 sf	Multi- Family	234 du	257/338 sp	338 sp	1.44 sp/du	1 sp/2 du	117 sp	24/94 sp	Notes-3 & 4
0 sf	Studio & 1 Bedroom	143 du	143/179 sp	n/a					
	2 Bedrooms	91 du	114/159 sp	n/a					
2 sf	Multi-Family Floor Area Detail								
	Bldg-3 Main Bldg.	193,400 sf							5-sty.
	Bldg-4 East Bldg.	63,709 sf							5-sty.
	Bldg-5 South Bldg.	54,928 sf							3-sty.
	Total	312,037 sf							
	Notes:								
					1	1	1		1

- 2 62 spaces of hotel parking + 6 spaces within residential deck are to be shared with office + 74 sp at 2nd level deck = 142 sp Total

 3. Second Level of 2-Story Parking Deck is Proposed as Optional with Shared Parking Study Approval by Town Manager.

 4. Total Residential Structured Parking Provided = 338 sp (5- Sty. Deck = 304 sp + Bldg-5 Garage = 34 sp)
- 5. Bicycle parking to include a min. of (23) short-term spaces on-street and the balance in locker, residential units and/or garage.

Accordance for the second process of the sec
2ONING PLAN- BLOCK-1 1" = 30'-0" 0 30 60 90 FT

Build-To Frontages Requ	neu/Pro		Juding D	esign Aite						Shaded Cells S	ubject to DA	
		Required				Provided						
	Frontage	Build-To %	Street Frontage	Facade & OAS in BTZ Regd.	Building	OAS	Total Bldg & OAS	Facade & OAS Reqd.vs Provided	% of Bldg. &	Total Facade & OAS in BTZ vs	% of OAS to Required Frontage (Max.	Design Alternat Proposed
Street ID	Туре	Required	(LF)	(LF)	Facade in BTZ		Frontage	Variance (LF)	OAS Provided	Required %	50%)	Notes
Fordham Service Total			218.5 LF	146.1 LF	137.5 LF	0.0 LF	137.5 LF	-8.6 LF	62.9%	94.1%	0.0%	
Fordham Service Dr.	В	60%	143.5 LF	86.1 LF	137.5 LF	0.0 LF	137.5 LF	51.4 LF	95.8%	159.7%	0.0%	
Fordham Service (wrap)	A1	80%	75.0 LF	60.0 LF	0.0 LF	0.0 LF	0.0 LF	-60.0 LF	0%	0%	0.0%	DA-3a
Novus Lane Total	A1	80%	787.5 LF	630.0 LF	358.5 LF	145.7 LF	504.2 LF	-125.8 LF	64%	80%	43.1%	
Block 1 Bldgs 1&2	A1	80%	277.5 LF	222.0 LF	134.5 LF	103.0 LF	237.5 LF	15.5 LF	85.6%	107.0%	39.4%	
Block 2 Bldg 3	A1	80%	346.0 LF	276.8 LF	62.0 LF	42.7 LF	104.7 LF	-172.1 LF	30%	37.8%	77.6%	DA-3c
Block 3 Bldg 5	A1	80%	164.0 LF	131.2 LF	162.0 LF	0.0 LF	162.0 LF	30.8 LF	98.8%	123.5%	0.0%	
Legion Rd. Total			136.7 LF	97.0 LF	118.5 LF	0.0 LF	118.5 LF	21.5 LF	86.7%	122.1%	0%	
Legion Rd.	A2	60%	61.7 LF	37.0 LF	47.5 LF	0.0 LF	47.5 LF	10.5 LF	77.0%		0%	
Legion Rd. (wrap)	A1	80%	75.0 LF	60.0 LF	71.0 LF	0.0 LF			94.7%		0%	
New Street-1 North Total			382.0 LF	244.2 LF	105.2 LF	224.5 LF	329.7 LF	85.5 LF	86.3%	135.0%	57%	DA-3b
New Street-1 (north)	A2	60%	307.0 LF	184.2 LF	93.6 LF	161.5 LF	255.1 LF	70.9 LF	83%		49%	Note-3
New Street-1 (north-wrap)	A1	80%	75.0 LF	60.0 LF	11.6 LF	63.0 LF	74.6 LF	14.6 LF	99%			DA-3b
, , ,	1											
New Street-1 South Total		9571	550.0 LF		351.9 LF	171.4 LF			95.1%		32.8%	
New Street-1 (south) Bldgs 2&3	A2	60%	475.0 LF	285.0 LF	351.9 LF	96.4 LF	448.3 LF	163.3 LF	94.4%	157.3%	21.5%	Note-2
New Street-1 (south-wrap)	A1	80%	75.0 LF	60.0 LF	0.0 LF	75.0 LF	75.0 LF	15.0 LF	100.0%	125.0%	100.0%	
New Street-2 North Total			174.5 LF		72.0 LF	0.0 LF						DA-4
New Street-2 (north)	A2	60%	99.5 LF	59.7 LF	10.0 LF	0.0 LF	10.0 LF	-49.7 LF	10%			DA-4
New Street-2 (north-wrap)	A1	80%	75.0 LF	60.0 LF	62.0 LF	0.0 LF	62.0 LF	2.0 LF	82.7%	103%	0.0%	
New Street-2 South Total			127.0 LF	91.2 LF	63.0 LF	0.0 LF	63.0 LF	-28.2 LF	50%	69%	0%	DA-6
New Street-2 (south)	A2	60%	52.0 LF	31.2 LF	0.0 LF	0.0 LF	0.0 LF	-31.2 LF	0%	0%	0%	DA-6
New Street-2 (south-wrap)	A1	80%	75.0 LF	60.0 LF	63.0 LF	0.0 LF	63.0 LF	3.0 LF	84.0%	105%	0%	
				1673.22 LF			1748.2 LF	74.98 LF	Facade & OAS	Provided vs Requi	red (Surplus)	
Design Alternate Summary: A Reques	t to Approve	••••									, , ,	
DA-1:an increase to a Block Length			Street-1 (sou	th).								
DA-2:an increase to a 517' Building							_					
DA-3a:an increase in the Build-to-Zo					treet-Novus Lan	ie wrap.						
DA-3b:an increase from 50% to 57%		•				·	f the Required Build	d-to-Zone Fronta	ge.(100% for Ty	vpe-A1 wrap)		
DA-3C:an increase in the depth fo the												
DA-4:a reduction from 60% to a 419							·					
DA-5:a reduced setback from 30' to				,		·).						
DA-6:a reduction from 60% to a 50%												
			J	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	,							
Notes:												

Note-1: Street frontage measured to functional limits of street and does not include frontage along Advance Auto boundary.

Note-2: Street frontage measured to functional limits of street and does not include frontage along Jiffy Lube boundary.



Scott Murray Land Planning, Inc. 1450 Environ Way Chapel Hill, NC 27517 274 Botetourt Ct. Boydton, VA 23917 252-213-9501 434-689-2925 (fax) www. stmlandplan.com smurray@stmlandplan.com

Project:

Tarheel Lodging
Redevelopment
Chapel Hill, North Carolina


Developer:

Tarheel Lodging, LLC and Unicorn Group Fifteen, LLC

> 6110 Falconbridge Rd. ste. 200 Chapel Hill, North Carolina 27517

Sheet Title::


Zoning Plan Block 1

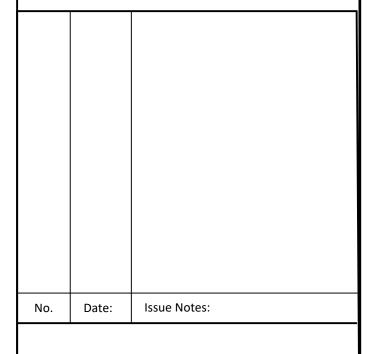

NOT FOR CONSTRUCTION

Copyright (c) by Scott Murray Land Planning, Inc. All Rights Reserved. Reuse of the material on these plans without prior written authorization is expressly prohibited.

Scale: as shown	
Date: July 20, 2018	CC111
Drawn By: STM	CS140
Drawing No.: na	of

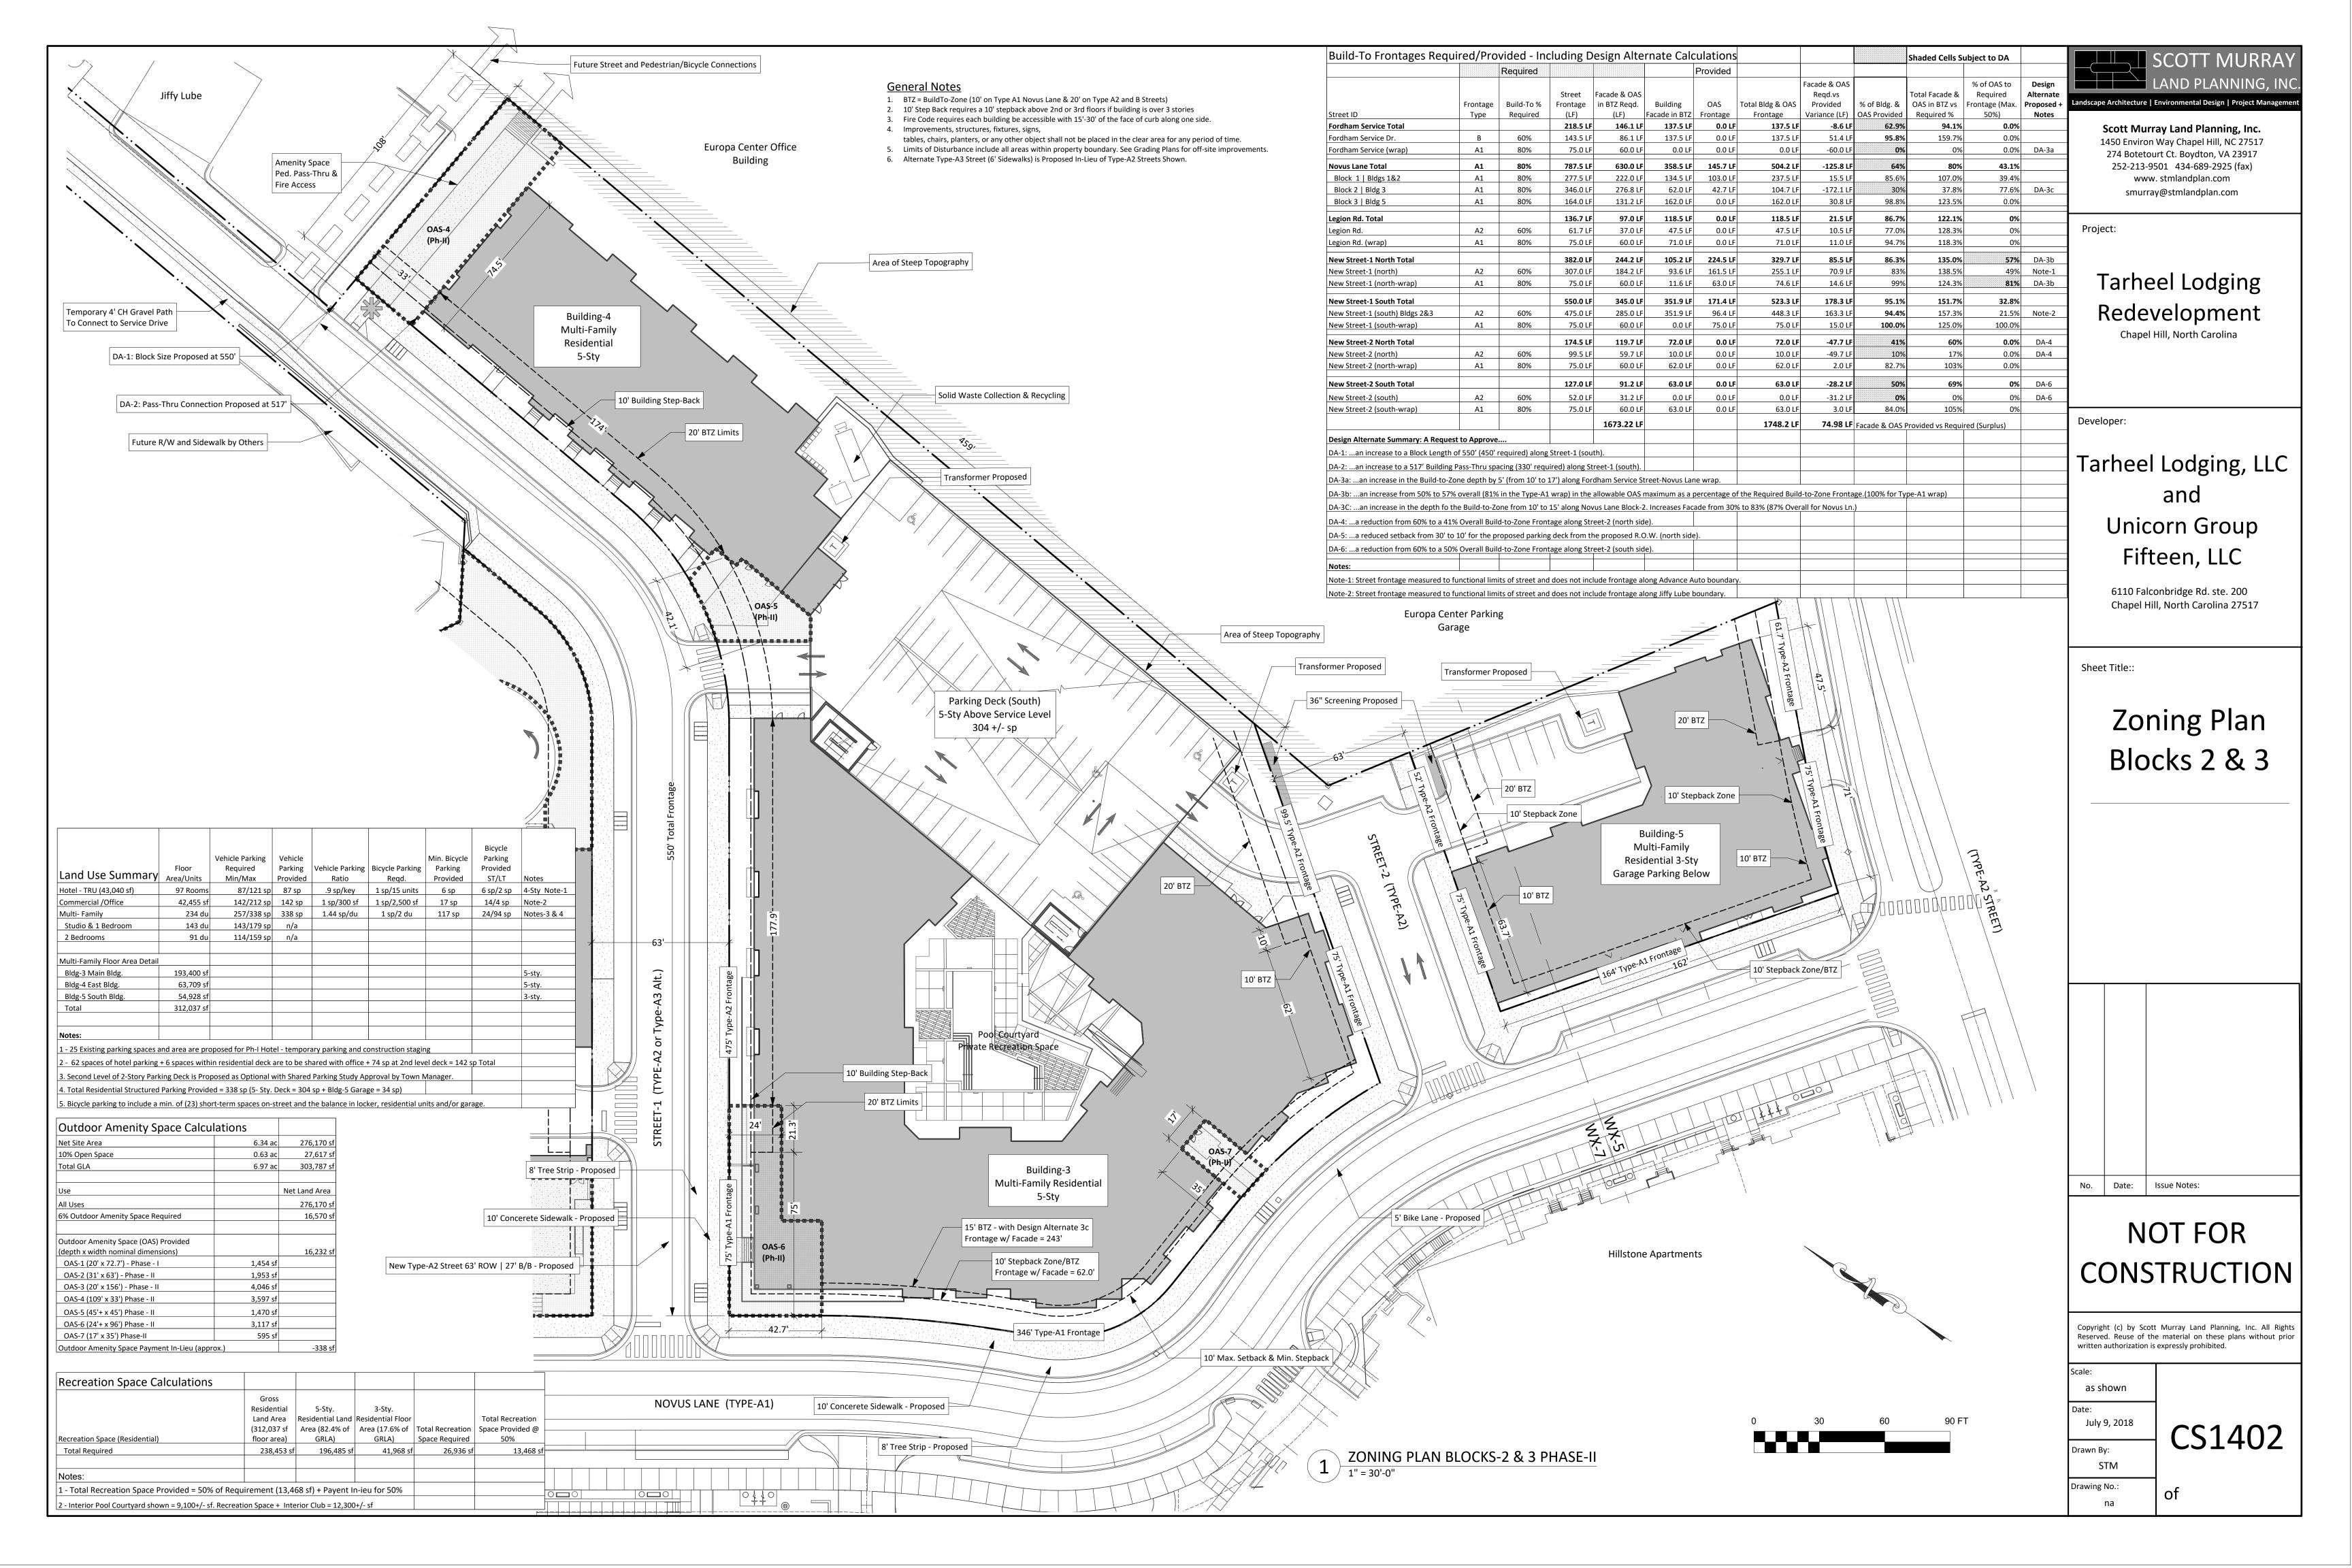

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Αv
Block-2 North Property Setback	ж	1.5 fc	9.0 fc	0.5 fc	18.0:1	3
Block-2 Setback & OAS-7	Ж	1.1 fc	4.9 fc	0.6 fc	8.2:1	
Building-5 Parking	Ж	2.5 fc	4.2 fc	1.2 fc	3.5:1	
Calc Zone #1	+	0.7 fc	11.4 fc	0.0 fc	N/A	
OAS-2	Ж	1.4 fc	4.6 fc	0.4 fc	11.5:1	
OAS-3	Ж	1.8 fc	5.5 fc	0.4 fc	13.8:1	
OAS-4	Ж	2.7 fc	11.2 fc	0.6 fc	18.7:1	
OAS-5	Ж	2.2 fc	5.8 fc	0.8 fc	7.3:1	:
OAS-6	Ж	3.9 fc	11.4 fc	1.1 fc	10.4:1	
Parking - Hotel Phase-1 Surface	ж	2.5 fc	5.7 fc	0.6 fc	9.5:1	
Parking South Garage Entrance	ж	2.6 fc	8.4 fc	0.7 fc	12.0:1	
Sidewalk & OAS-1 Ph-I	Ж	1.5 fc	4.9 fc	0.6 fc	8.2:1	
Street New & Novus Lane	Ж	1.2 fc	8.1 fc	0.3 fc	27.0:1	Π.

Schedule											
Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Lamp	Number Lamps	Filename	Lumens Per Lamp	Light Loss Factor	Wattage
	DR	19	American Electric Lighting	ATB0 20B LED E10 XXXXX R3	ATB0 SERIES 72W LED 1000MA TYPE 3 4000K CCT	20B 4K LED ARRAY	1	LED Area 70 watt.ies	6264	1	72
	DA	10	Holophane	GBLF 070 4K XXXX L3	GLASWERKS LED BERN	63 4K LED ARRAY	1	LED Sanibel 70 watt.ies	5534	1	70.9
	DP	22	COOPER LIGHTING - - STREETWORKS	ARC050650LEDEU33	LED POST TOP TYPE III NO CAGE	6 LED UNIT, 5000CCT, 65CRI	6	LED Mini Bell 50 watt.ies	559	1	57.4
	D3	5	COOPER LIGHTING - - STREETWORKS	GAN-AE-04-LED-U-T3R	GALLEON LED AREA AND ROADWAY LUMINAIRE (4) 70 CRI, 4000K, 1A LIGHTSQUARES WITH 16 LEDS EACH AND TYPE III ROADWAY OPTICS ABSOLUTE PHOTOMETRY IS BASED ON CALIBRATION FACTORS CREATED USING LAB LUMEN STANDARDS IN GONIOPHOTOMETER WITH TEST DISTANCE OF 28.75 FEET		64	LED205C_3.ies	330	1	213
	D4	1	COOPER LIGHTING - - STREETWORKS	GAN-AE-04-LED-U-T4W	GALLEON LED AREA AND ROADWAY LUMINAIRE (4) 70 CRI, 4000K, 1A LIGHTSQUARES WITH 16 LEDS EACH AND TYPE IV WIDE OPTICS ABSOLUTE PHOTOMETRY IS BASED ON CALIBRATION FACTORS CREATED USING LAB LUMEN STANDARDS IN GONIOPHOTOMETER WITH TEST DISTANCE OF 28.75 FEET		64	LED205C_4.ies	321	1	213
	D33	1	COOPER LIGHTING - - STREETWORKS	GAN-AE-04-LED-U-T3R	GALLEON LED AREA AND ROADWAY LUMINAIRE (4) 70 CRI, 4000K, 1A LIGHTSQUARES WITH 16 LEDS EACH AND TYPE III ROADWAY OPTICS ABSOLUTE PHOTOMETRY IS BASED ON CALIBRATION FACTORS CREATED USING LAB LUMEN STANDARDS IN GONIOPHOTOMETER WITH TEST DISTANCE OF 28.75 FEET		64	LED205C_3.ies	330	1	426
	W1	5	Lithonia Lighting	WST LED P3 40K VW MVOLT	WST LED, Performance package 3, 4000 K, visual comfort wide, MVOLT	LED	1	WST_LED_P3_40K_ VW_MVOLT.ies	6689	1	50

scape Architecture | Environmental Design | Project Manageme

Scott Murray Land Planning, Inc. 1450 Environ Way Chapel Hill, NC 27517 274 Botetourt Ct. Boydton, VA 23917 252-213-9501 434-689-2925 (fax)

> www. stmlandplan.com smurray@stmlandplan.com

Project:

Tarheel Lodging Redevelopment Chapel Hill, North Carolina


Developer:

Tarheel Lodging, LLC and Unicorn Group Fifteen, LLC

Sheet Title::

Lighting Plan

No. Date: Issue Notes:

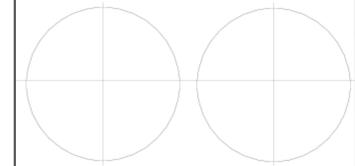

Copyright (c) by Scott Murray Land Planning, Inc. All Rights Reserved. Reuse of the material on these plans without prior written authorization is expressly prohibited.


As Shown Date: May 21, 2018

CS2401

Drawn By: STM Drawing No.:

1. DR1-DR4, DR16 & DR23 are Roadway fixtures provided by Leon Cap. pursuant to the approved Hillstone FDP. They are shown here to demostrate adequate lighting along Novus Lane.

2. D3 & D4 fixtures shown for the Phase-1 surface parking. Any modifications to lighting for Phase-2 parking deck will be submitted with final Phase-2 FDP

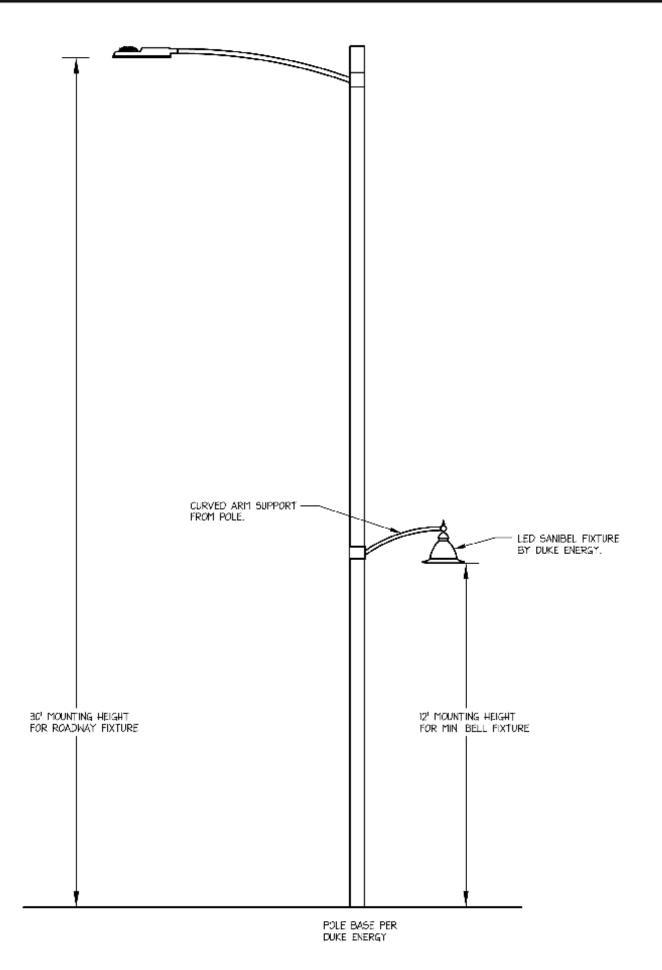

'DR' Roadway Light with 'DA' Mini Bell Pedestrian Light Attached



The Roadway LED is a green solution and great fit for streets, roads, long, narrow areas and parking lots. This energy-efficient luminaire delivers the light where it is needed while increasing visibility and reducing spill light to adjoining properties. Choose low to medium light output on wood or fiberglass poles (or mount on an existing pole). Available with one to four fixtures per pole, depending on the fixture/pole combination selected.

LED (Light Emitting Diode) 50 | 70 | 110 | 150 | 220 | 280 watts

Mounting heights 15', 20', 25', 30', 35'

Bronze Black

Green

Poles Style A, C Wood

Light source: LED (white)


Wattage: 50 | 70 | 110 | 150 | 220 | 280

Light pattern: IESNA Type III (oval)

IESNA cutoff classification: Full cutoff

Color temperature: 4,000K

Warm-up and restrike time: Instant on (no warm-up or restrike time)

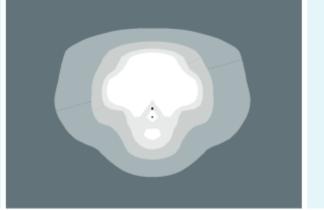


Type 'DR' - Duke Energy Roadway Lighting

DUKE ENERGY.

Outdoor Lighting

Sanibel LED

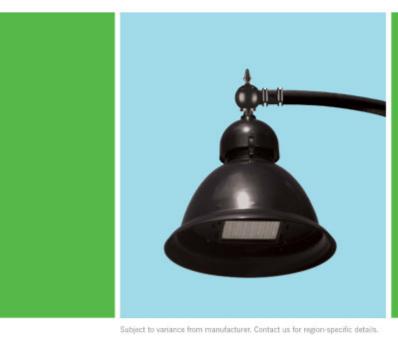

The beauty of the stylish Sanibel LED is its remarkable versatility. Its sleek simplicity, with a gently curved bracket that helps cast light downward, is at home virtually anywhere — from more formal traditional neighborhoods to beachfront communities and other casual locales.

LED (Light Emitting Diode)	70 150 watts
Mounting heights	15', 20', 25'
Colors	Black Green
Poles	Style A, C



Outdoor Lighting Sanibel LED

Pole available:

Turnkey operation

Light source: LED (white)
Wattage: 70, 150
Lumens: 5,500 | 12,500


Light pattern: IESNA Type III (oval)

IESNA cutoff classification: Full cutoff

Color temperature: 4,000K

One low monthly cost on your electric bill

Backed by over 40 years of experience

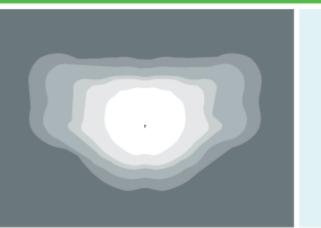

light distribution pattern

Convenience and savings for you

Provides hassle-free installation and service

A name you can trust today ... and tomorrow


Туре	Mounting height	Color		
Aluminum	15', 20', 25'	Black Green		
Features	Benefits			
No installation cost	Frees up capital for other	Frees up capital for other projects		
Design services by lighting professionals included	Meets industry standards	and lighting ordinances		
Maintenance included	Eliminates high and une	Eliminates high and unexpected repair bills		
Electricity included	Less expensive than metered service			
Warranty included	Worry-free			

©2017 Duke Energy Corporation 170243 4/17

<u>Type 'DA' - Duke Energy Sanibel Arm-</u> <u>Mounted</u>

Outdoor Lighting

Mini Bell LED

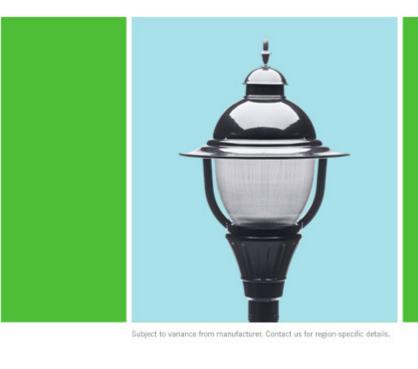

The Mini Bell LED is an energy-efficient luminaire with a classic, sophisticated design. This fixture is an excellent choice for illuminating pathways and residential communities.

LED (Light Emitting Diode)	50 watts
Mounting height	12', 17' (Style B pole only)
Colors	Black Green
Poles	Style A, B, C, D, E, F
Applications	Neighborhoods Parks

For additional information, visit duke-energy.com/OutdoorLighting or call us toll free: 800.544.6900 (OH and KY) 800.521.2232 (IN)



Outdoor Lighting


Mini Bell LED

Light source: LED (white)
Wattage: 50
Lumens: 4,500

Light pattern: IESNA Type III (oval)
IESNA cutoff classification: Cutoff

Color temperature: 4,000K

Warm-up and restrike time: Instant on (no warm-up or restrike time)

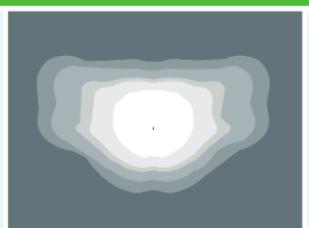

light distribution pattern

A name you can trust today ... and tomorrow

Pole	2 21/2	ilal	ale.

Backed by over 125 years of experience

Mounting height	Color		
12', 17' (Style B pole only)	Black Green		
Benefits			
Frees up capital for other projects			
Meets industry standards and lighting ordinances			
Eliminates high and unexpected repair bills			
Less expensive than metered service			
Worry-free			
Convenience and savings for you			
Provides hassle-free installation and service			
	Benefits Frees up capital for other proje Meets industry standards and Eliminates high and unexpecte Less expensive than metered s Worry-free Convenience and savings for year		

©2018 Duke Energy Corporation 172628 1/18

<u>Type 'DP' - Duke Energy Mini-Bell Post-</u> <u>Mounted</u>



Scott Murray Land Planning, Inc. 1450 Environ Way Chapel Hill, NC 27517 274 Botetourt Ct. Boydton, VA 23917 252-213-9501 434-689-2925 (fax) www. stmlandplan.com smurray@stmlandplan.com

Project:


Tarheel Lodging
Redevelopment
Chapel Hill, North Carolina


Developer:

Tarheel Lodging, LLC and Unicorn Group Fifteen, LLC

Sheet Title::

Lighting Details

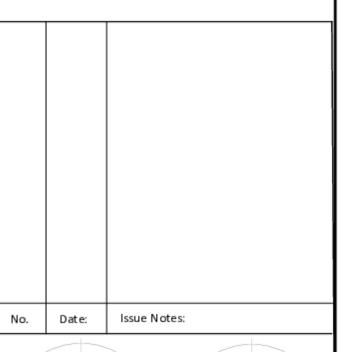

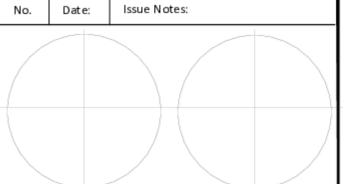

Copyright (c) by Scott Murray Land Planning, Inc. All Rights Reserved. Reuse of the material on these plans without prior written authorization is expressly prohibited.

Scale:
As Shown

Date:
May 21, 2018

Drawn By:

May 21, 2018


Drawn By:
STM

Drawing No.:

of


of



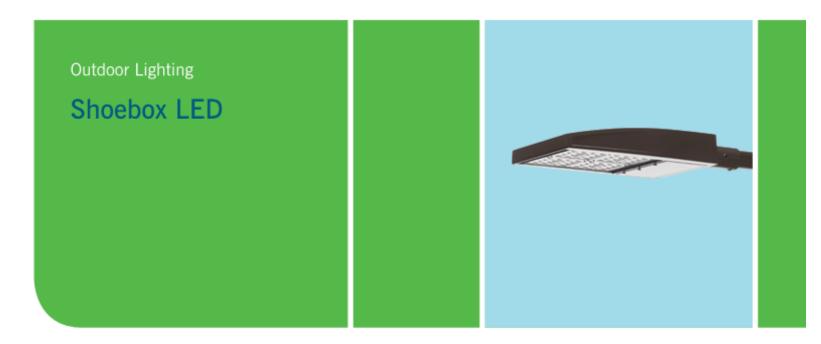

The energy-efficient Shoebox LED combines a decorative, contemporary style with versatility and ample lighting effect that is perfect for streets, parking lots, commercial buildings and residential communities. The Shoebox LED provides excellent color rendition along with a controlled light pattern that reduces glare and keeps the light directed only where you want it. Available in black or dark bronze with one to four fixtures per pole.

LED (Light Emitting Diode)	205 watts
Mounting heights	30', 35'
Colors	Black Bronze
Poles	Fiberglass Decorative tapered metal Decorative square metal
Application	Parking lots

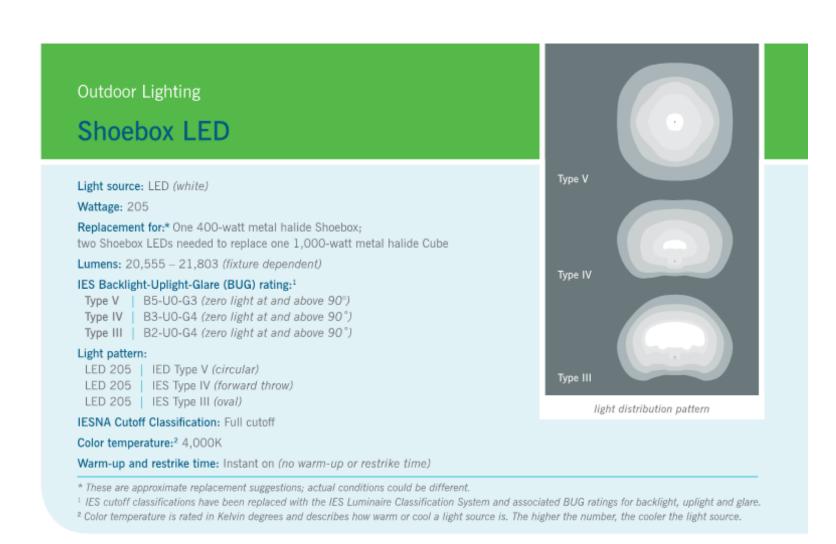

Types 'D3', 'D33' & 'D4' - Shoebox Lighting

D3 - Single Fixture Type-III Distribution

D33 - Double Fixture Type-III Distribution

D4 - Single Fixture Type-IV

WST LED

NST LED P3 40K VW MVOLT DDBXD Architectural Wall Sconce



Specifications

10-3/16"

Optional Back Box (PBBW)

Optional Back Box (BBW)

1-1/2"

LITHONIA

Luminaire

Width:

Width:



+ Capable Luminaire

requirements

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

· All configurations of this luminaire meet the Acuity

Brands' specification for chromatic consistency

PM&E to verify photocell or other switching


- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability1
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background¹

To learn more about A+,


visit www.acuitybrands.com/aplus. See ordering tree for details.

A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: Link to Roam; Link to DTL DLL

Isofootcandle plots for the WST LED P3 40K VF and VW. Distances are in units of mounting height (10'). 4 1 2 1 0 1 2 3 4 5

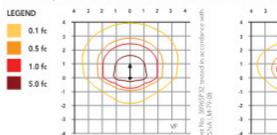

4 1 2 1 0 1 2 3 4

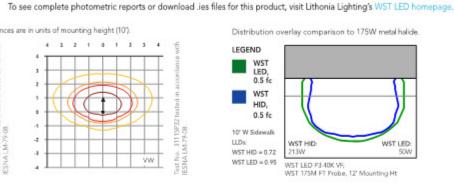

FEATURES & SPECIFICATIONS

hotometric Diagrams

The classic architectural shape of the WST LED was designed for applications such as hospitals, schools, malls, restaurants, and commercial buildings. The long life LEDs and driver make this luminaire nearly maintenance-free. CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP65 rating for the luminaire.

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

Well crafted reflector optics allow the light engine to be recessed within the luminaire, providing visual comfort, superior distribution, uniformity, and spacing in wall-mount applications. The WST LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

Light engine(s) consist of 98 high-efficacy LEDs mounted to a metal core circuit board and integral aluminum heat sinks to maximize heat dissipation and promote long life (100,000 hrs at 40°C, L87). Class 2 electronic driver has a power factor >90%, THD <20%. Easily-serviceable surge protection device meets a minimum Category B (per ANSI/IEEE C62.41.2).

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections.

CSA certified to U.S. and Canadian standards. Luminaire is IP65 rated. PIR and back box options are rated for wet location. Rated for -30°C to 40°C ambient. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

5-year limited warranty. Complete warranty terms located at:

Developer:

Project:

Tarheel Lodging, LLC and Unicorn Group Fifteen, LLC

ndscape Architecture | Environmental Design | Project Managemen

Scott Murray Land Planning, Inc.

1450 Environ Way Chapel Hill, NC 27517

274 Botetourt Ct. Boydton, VA 23917

252-213-9501 434-689-2925 (fax)

www. stmlandplan.com

smurray@stmlandplan.com

Tarheel Lodging

Redevelopment

Chapel Hill, North Carolina

Sheet Title::

Lighting Details



One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com © 2011-2017 Acuity Brands Lighting, Inc. All rights reserved.

WST-LED Rev. 11/01/17





WST-LED

Rev. 11/01/17





WST LED							
Series	Performance Package Color temperature		Distribution	Voltage	Mounting		
WST LED	P1 1,500 Lumen package P2 3,000 Lumen package P3 6,000 Lumen package	27K 2700 K 30K 3000 K 40K 4000 K 50K 5000 K	VF Visual comfort forward throw VW Visual comfort wide	MVOLT ¹ 277 ² 120 ² 347 ² 208 ² 480 ² 240 ²	Shipped included (blank) Surface mounting bracket Shipped separately BBW Surface-mounted back box ³ PBBW Premium surface-mounted back box ³		

One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com

@ 2011-2017 Acuity Brands Lighting, Inc. All rights reserved.

ptions				Finish (required)		
PE PER PERS PER7 PIR PIRIFC3V PIRH PIRH1FC3V SF DF DS E7/WH	Photoelectric cell, button type ⁵ NEMA twist-lock receptacle only (controls ordered separate) ⁶ Five-wire receptacle only (controls ordered separate) ⁶ Seven-wire receptacle only (controls ordered separate) ⁶ Motion/Ambient Light Sensor, 8-15' mounting height ²⁸ Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ²⁸ 180° motion/ambient light sensor, 15-30' mounting height, ambient sensor enabled at 1fc ²⁸ Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ²⁸ Single fuse (120, 277, 347V) ² Double fuse (208, 240, 480V) ² Dual switching ⁹ Emergency battery backup, Non CEC compliant (7W) ¹⁰	E7WC E7WHR E20WH E20WC E23WHR LCE RCE Shipped: RBPW VG WG	Emergency battery backup, Non CEC compliant (cold, 7W) ^{10,11} Remote emergency battery backup, Non CEC compliant (remote 7W) ^{10,12} Emergency battery pack 18W constant power, CEC compliant ¹⁰ Emergency battery pack -20°C 18W constant power, CEC compliant ^{10,11} Remote emergency battery backup, Non CEC compliant (remote 20W) ^{10,10,13} Left side conduit entry ¹⁴ Right side conduit entry ¹⁴ Right side conduit entry ¹⁴ Separately Retrofit back plate ¹ Vandal guard ¹⁵ Wire guard ¹⁵	DDBXD DBLXD DNAXD DWHXD DSSXD DDBTXD DBLBXD DNATXD DWHGXD DSSTXD	Dark bronze Black Natural aluminum White Sandstone Textured dark bronze Textured black Textured natural aluminu Textured white Textured sandstone	


Accessories						
Ordered	and shipped separately.					
M2LACLBBM DDBXD N	Premium Surface - mounted ha					
WSBBW DOBTX U	Surface - mounted back box					

- 1 MVOLT driver operates on any line voltage from 120-277V (50/60 9 Not available with Emergency options, PE or PER options.
- 8 Reference Motion Sensor table.
- 5 Need to specify 120, 208, 240 or 277 voltage.
- 2 Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) 11 Battery pack rated for -20° to 40°C. requires 208V, 240V or 480V. 12 Comes with PBBW. 12 Comes with PBBW. 3 Also available as a separate accessory; see accessories information. 13 Warranty period is 3-years 14 Not available with BBW. 15 Must order with fixture; not an accessory.

6 Photocell ordered and shipped as a separate line item from Acuity Brands Controls. Shorting Cap included. 7 Not available with VG or WG. See PER Table.

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency backup configurations include an independent secondary driver with an integral relay to immediately detect AC power loss, meeting interpretations of NFPA 70/NEC 2008 - 700.16 The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time supply power is lost, per International Building Code Section 1006 7.9, provided luminaires are mounted at an appropriate height and illuminate an open space with no major obstructions



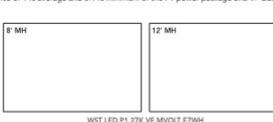







One Lithonia Way . Conyers, Georgia 30012 . Phone: 800.279.8041 . www.lithonia.com

Emergency Battery Operation


The examples below show illuminance of 1 fc average and 0.1 fc minimum of the P1 power package and VF distribution product in emergency mode.

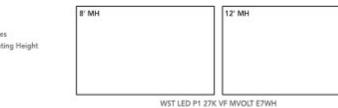


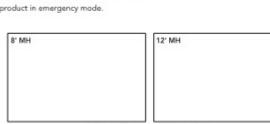

WST LED P2 40K VF MVOLT E20WH






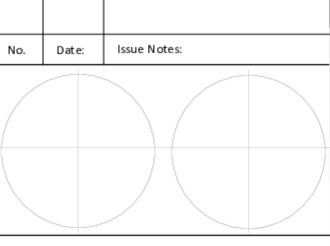

Copyright (c) by Scott Murray Land Planning, Inc. All Rights Reserved. Reuse of the material on these plans without prior


written authorization is expressly prohibited. Scale: As Shown Date: CS2403 May 21, 2018 Drawn By:

STM Drawing No.:

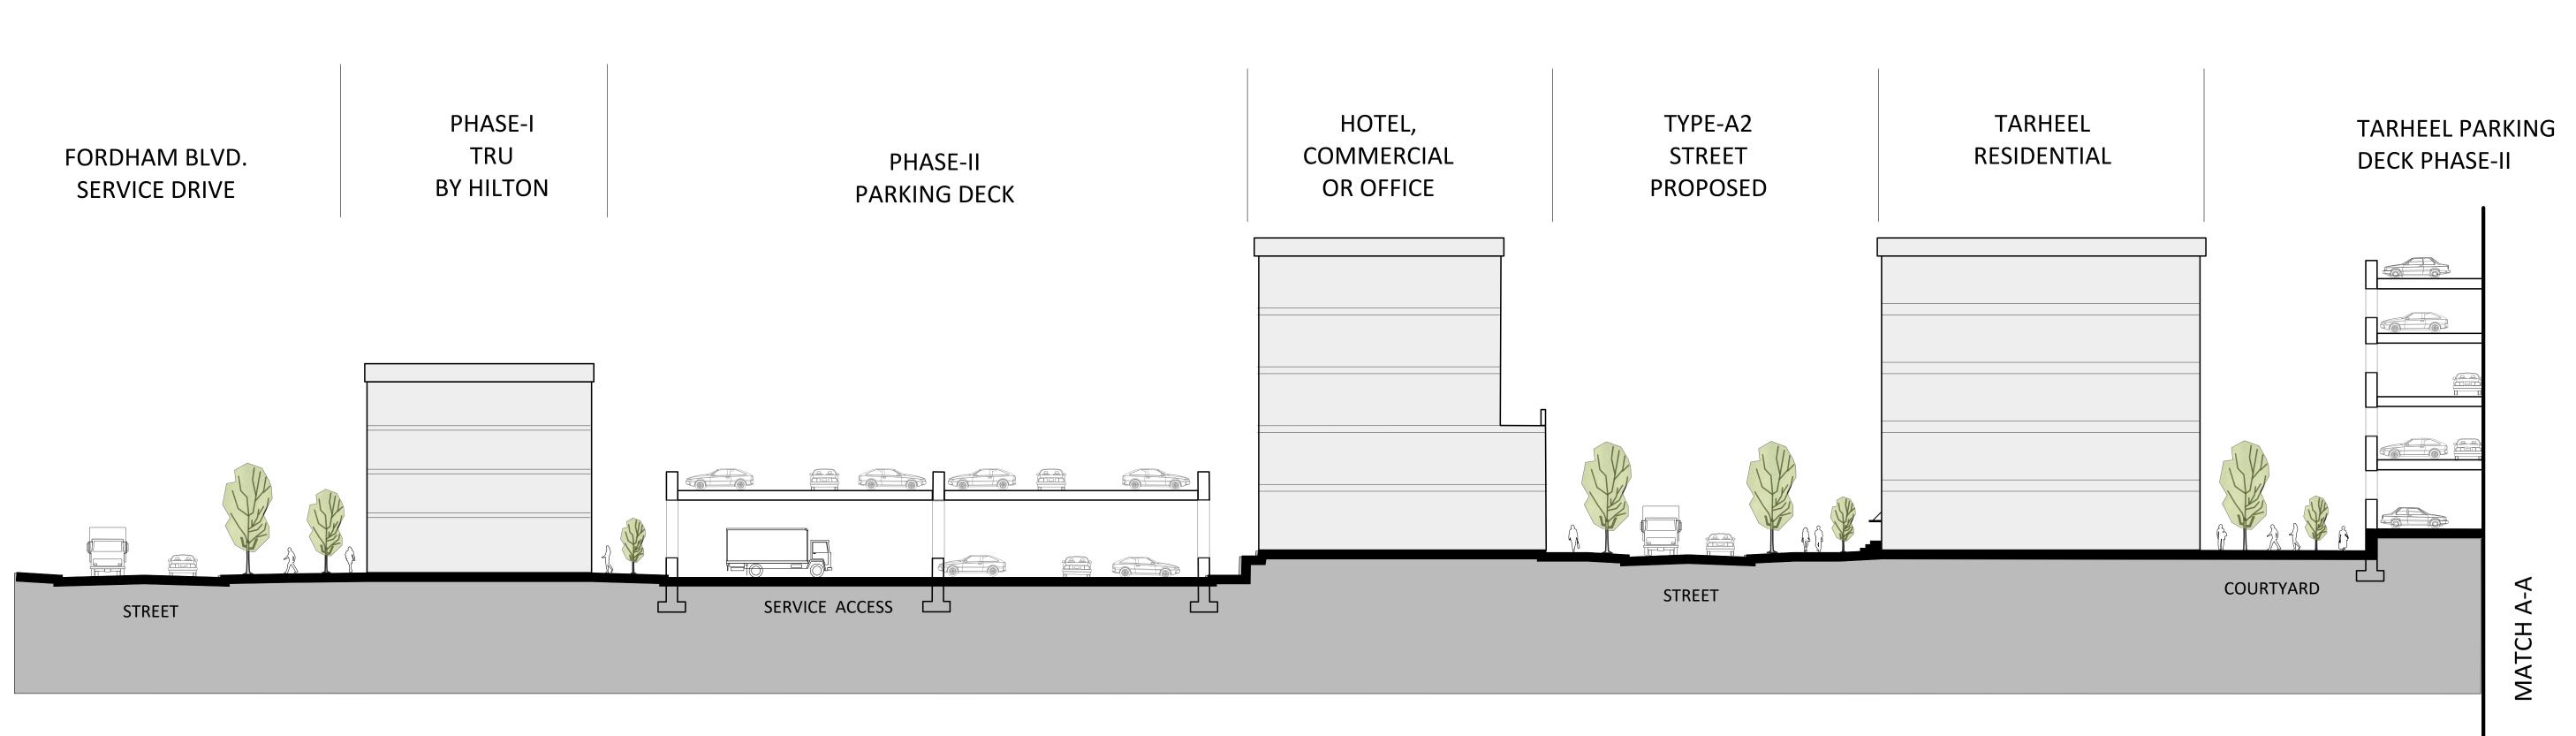



SECTION A

SITE KEY

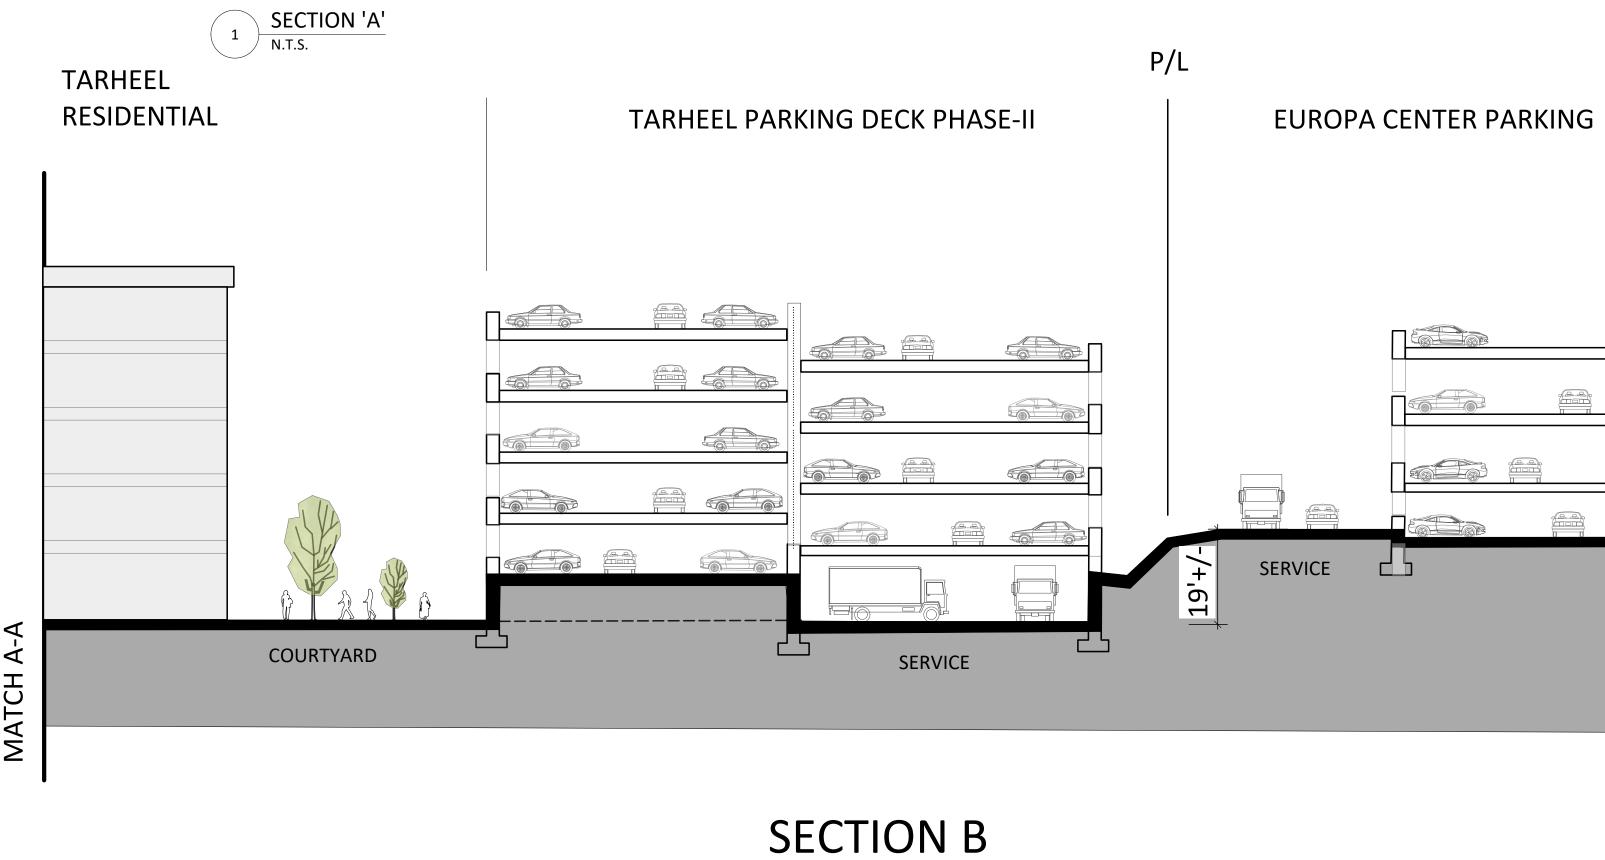



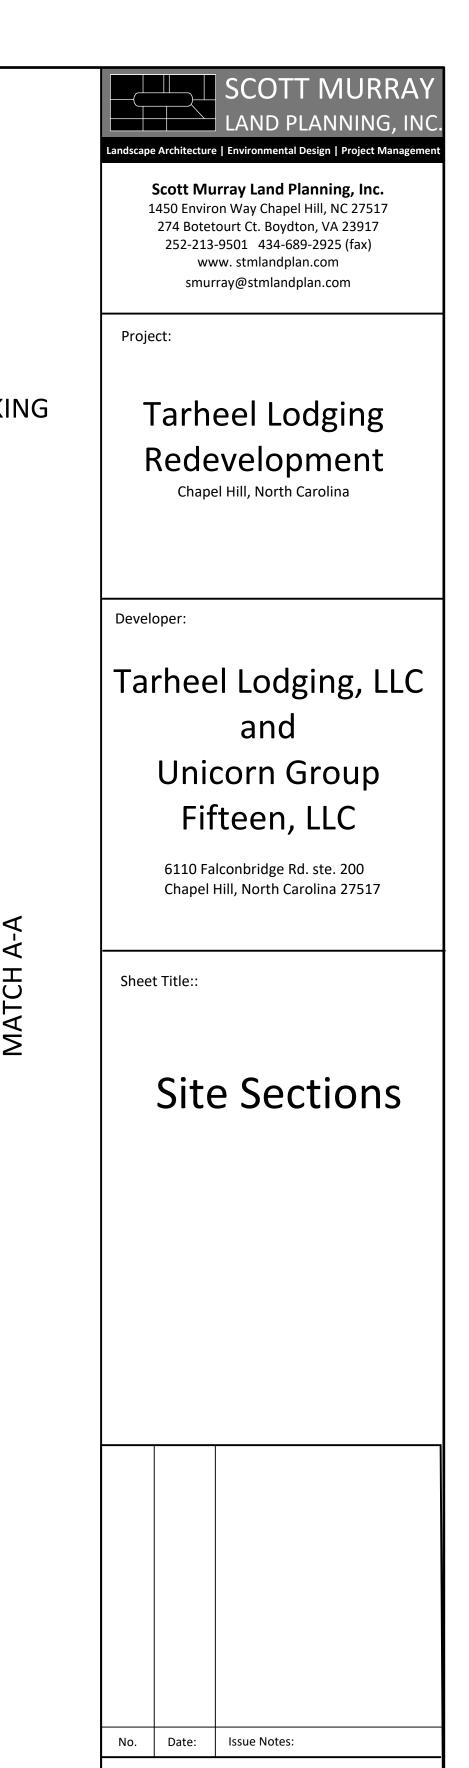


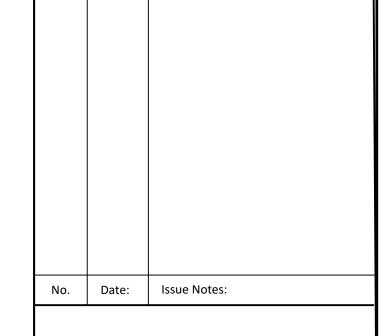


NOT FOR CONSTRUCTION

Copyright (c) by Scott Murray Land Planning, Inc. All Rights Reserved. Reuse of the material on these plans without prior written authorization is expressly prohibited.

aie: as shown	
ate: May 21, 2018	CS7200
	1 ()//(//
rawn By: STM	

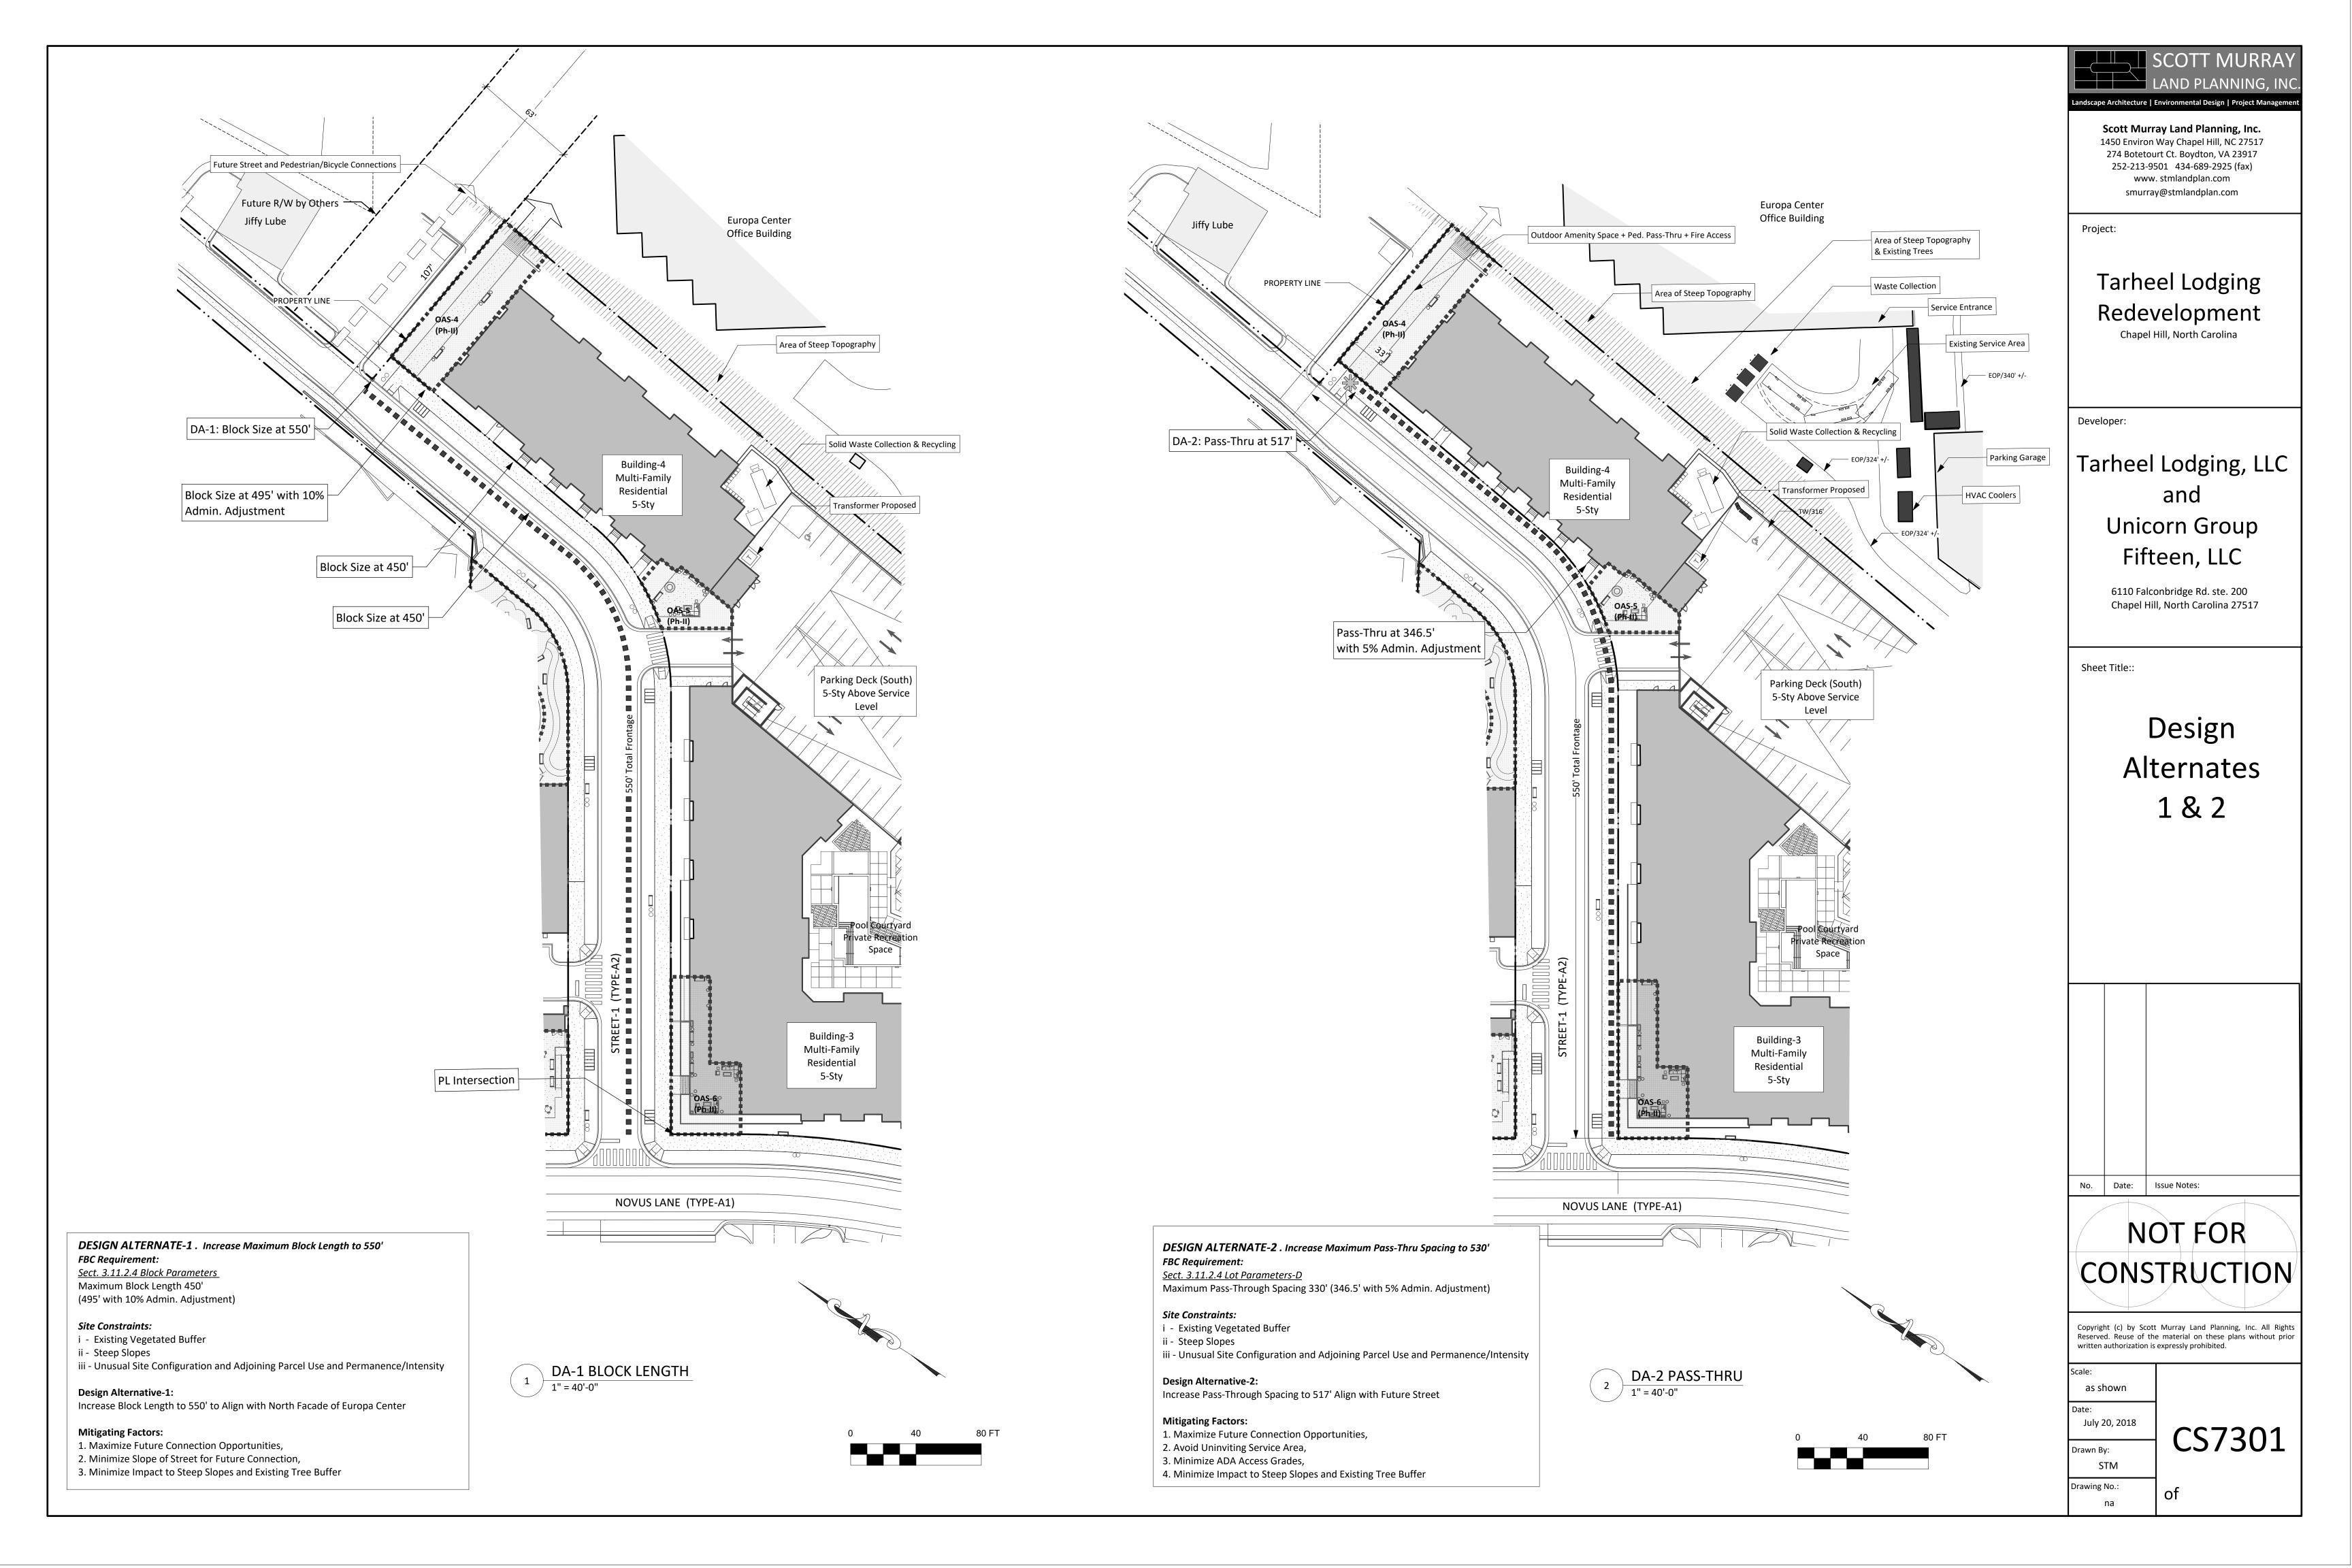

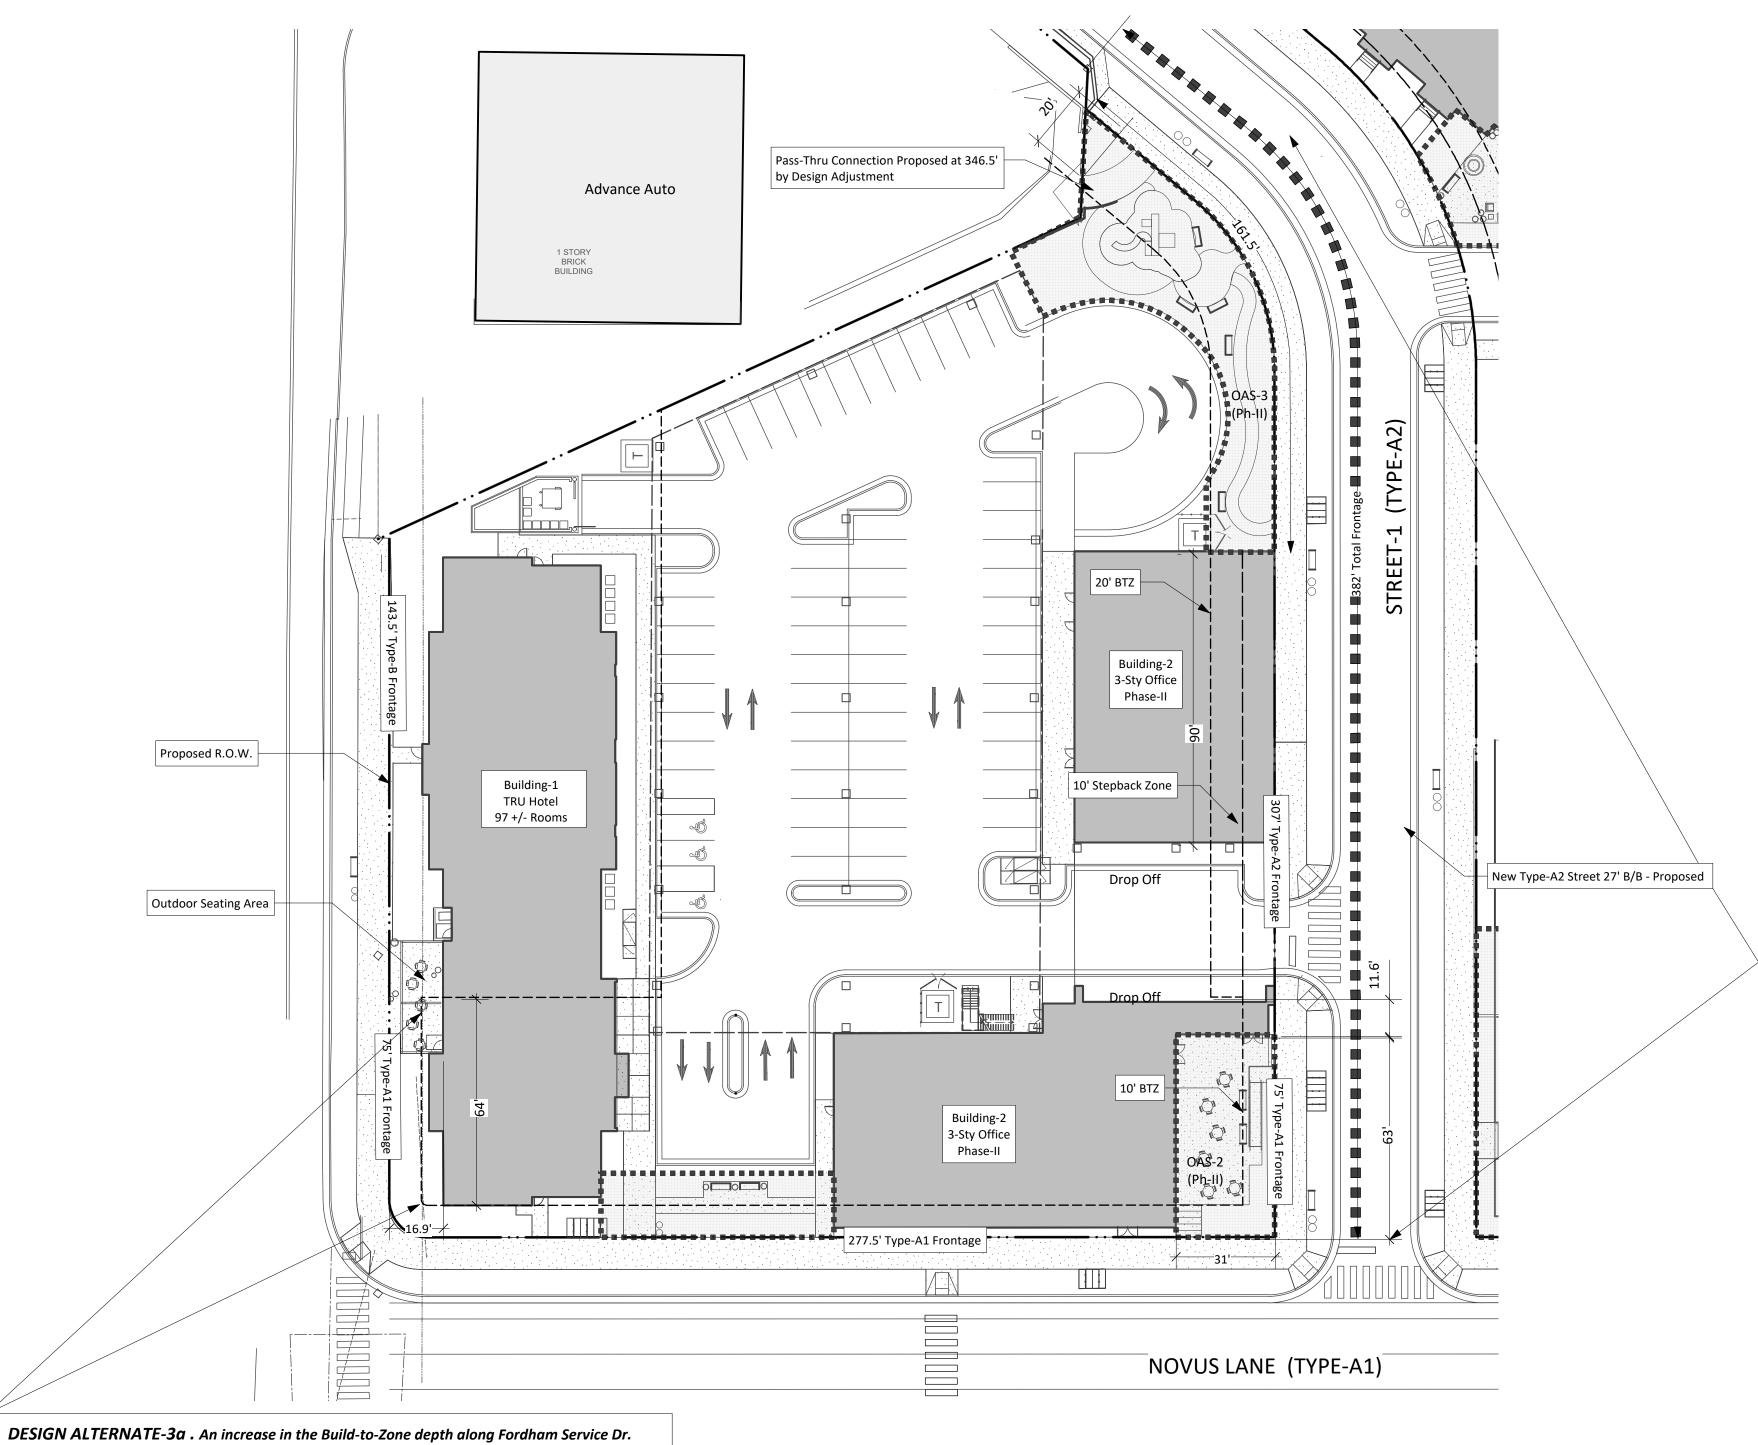

Build-To Frontages Required/Provided - Including Design Alternate Calculations Shaded Cells Subject to DA Required Facade & OAS % of OAS to Reqd.vs
Total Bldg & OAS Provided Total Facade & Required Alternate Frontage in BTZ Reqd. Building OAS % of Bldg. & OAS in BTZ vs Frontage (Max. Proposed + Variance (LF) OAS Provided (LF) Facade in BTZ Frontage Notes Frontage Required % 50%) Fordham Service Total Fordham Service Dr. 0.0% DA-3a Fordham Service (wrap) 630.0 LF 358.5 LF 145.7 LF Novus Lane Total Block 1 | Bldgs 1&2 Block 2 | Bldg 3 346.0 LF 276.8 LF 62.0 LF 42.7 LF 104.7 LF 77.6% DA-3c 80% -172.1 LF 164.0 LF 162.0 LF Block 3 | Bldg 5 131.2 LF 162.0 LF 0.0 LF 30.8 LF Legion Rd. Total 47.5 LF 47.5 LF 0.0 LF Legion Rd. 71.0 LF 0.0 LF 71.0 LF Legion Rd. (wrap) New Street-1 North Total New Street-1 (north) 307.0 LF 255.1 LF A2 60% 93.6 LF 161.5 LF 49% Note-1 74.6 LF **81**% DA-3b 75.0 LF New Street-1 (north-wrap) 11.6 LF 63.0 LF 550.0 LF 345.0 LF 351.9 LF 171.4 LF 523.3 LF New Street-1 South Total 178.3 LF 351.9 LF 96.4 LF 21.5% Note-2 60% 448.3 LF 163.3 LF New Street-1 (south-wrap) New Street-2 North Total 119.7 LF 72.0 LF 0.0 LF 72.0 LF **0.0**% DA-4 0.0% DA-4 10.0 LF A2 60% New Street-2 (north) A1 80% New Street-2 (north-wrap) 0.0% **0%** DA-6 91.2 LF 63.0 LF 0.0 LF 63.0 LF New Street-2 South Total -28.2 LF 52.0 LF 60% New Street-2 (south) 0% DA-6 A1 80% 75.0 LF New Street-2 (south-wrap) 74.98 LF Facade & OAS Provided vs Required (Surplus) 1673.22 LF Design Alternate Summary: A Request to Approve. DA-6: ...a reduction from 60% to a 50% Overall Build-to-Zone Frontage along Street-2 (south side

DESIGN ALTERNATE-3b | Block-1 Open Space as a Maximum Percentage of Required Frontages (Type-A1 Wrap & Type-A2)

Sect. 3.11.2.7.F.4 - Outdoor Amenity Space (d)

Outdoor amenity space may be counted to meet up to one-half (1/2) of the frontage distance of the build-to-zone percentage

Site Constraints:

Unusual Site Configuration and Adjoining Intersection Spacing Requirments and Circulation

Note-2: Street frontage measured to functional limits of street and does not include frontage along Jiffy Lube boundary.

- No Other Means of Ingress/Egress to Structured Parking Level-2 Constrains Building Placement
- Recommended findings of Urban Design Analysis to Locate Outdoor Amenity Space on Corner at Type-A1 wrap

Design Alternative-3b Proposed:

An increase from 50% to 60% overall (85% for Type-A1 wrap) in the allowable OAS maximum as a percentage of the Required Build-to-Zone Frontage required along Street-1 (north side). Increase to 85% for Type-A1 wrap.

Mitigating Factors:

- 1. Provide External Level-2 Parking Ramp Designed to Serve as an Architectural Backdrop to Adjacent Outdoor Amenity Space.
- 2. Provide Prominent/High-Visibility OAS at Street Intersection to Animate Steet Activity.
- 3. Increase Diversity of OAS and Provide for Active Children's Play Area.

SCOTT MURRAY LAND PLANNING, IN ndscape Architecture | Environmental Design | Project Manageme

> Scott Murray Land Planning, Inc. 1450 Environ Way Chapel Hill, NC 27517 274 Botetourt Ct. Boydton, VA 23917 252-213-9501 434-689-2925 (fax) www. stmlandplan.com smurray@stmlandplan.com

Project:

Tarheel Lodging Redevelopment Chapel Hill, North Carolina

Developer:

Tarheel Lodging, LLC and Unicorn Group Fifteen, LLC

> 6110 Falconbridge Rd. ste. 200 Chapel Hill, North Carolina 27517

Sheet Title::

Design **Alternates** 3a-3b

No. Date: Issue Notes: NOT FOR

CONSTRUCTION

Copyright (c) by Scott Murray Land Planning, Inc. All Rights Reserved. Reuse of the material on these plans without prior written authorization is expressly prohibited.

as shown

July 20, 2018 CS7302 Drawn By: STM Drawing No.:



1) 1" = 30'-0"

DA-3a & 3b FRONTAGES, BTZ and OPEN SPACE CREDIT

Site Constraints: i - Primary Building Facade is positioned 10' from proposed ROW to accommodate vertical articulation of facade and maintain a diversity of room sizes.

ii - Shifting towards ROW at corner creates conflicts with FBC Sect 3.11.2.4.3.C Building Stepback. iii - Custom modification of building floorplan compromises affordability of lodging proposed.

Design Alternative-3a Proposed:


Sect. 3.11.2.1.D.5 Districts and Frontages


An increase in the Build-to-Zone depth by 7' (from 10' to 17' x 60') along Fordham Service Street-Novus Lane Type-A1 wrap.

Mitigating Factors:

FBC Requirement:

- 1. Enhanced Vertical Architectural Articulation and Diversity of Room Sizes and Prices.
- 2. Overall Building Facade Within BTZ Is 162.3' vs 147.0' Required, an Increase Of More Than 10%.
- 3. Building Facade Along Type-B Street Within 20' of ROW Totals 92% Exceeding a Type-A2 Standard for Building Frontage.

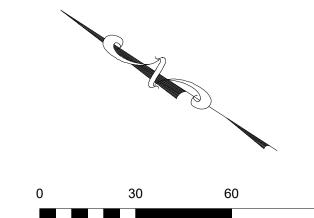

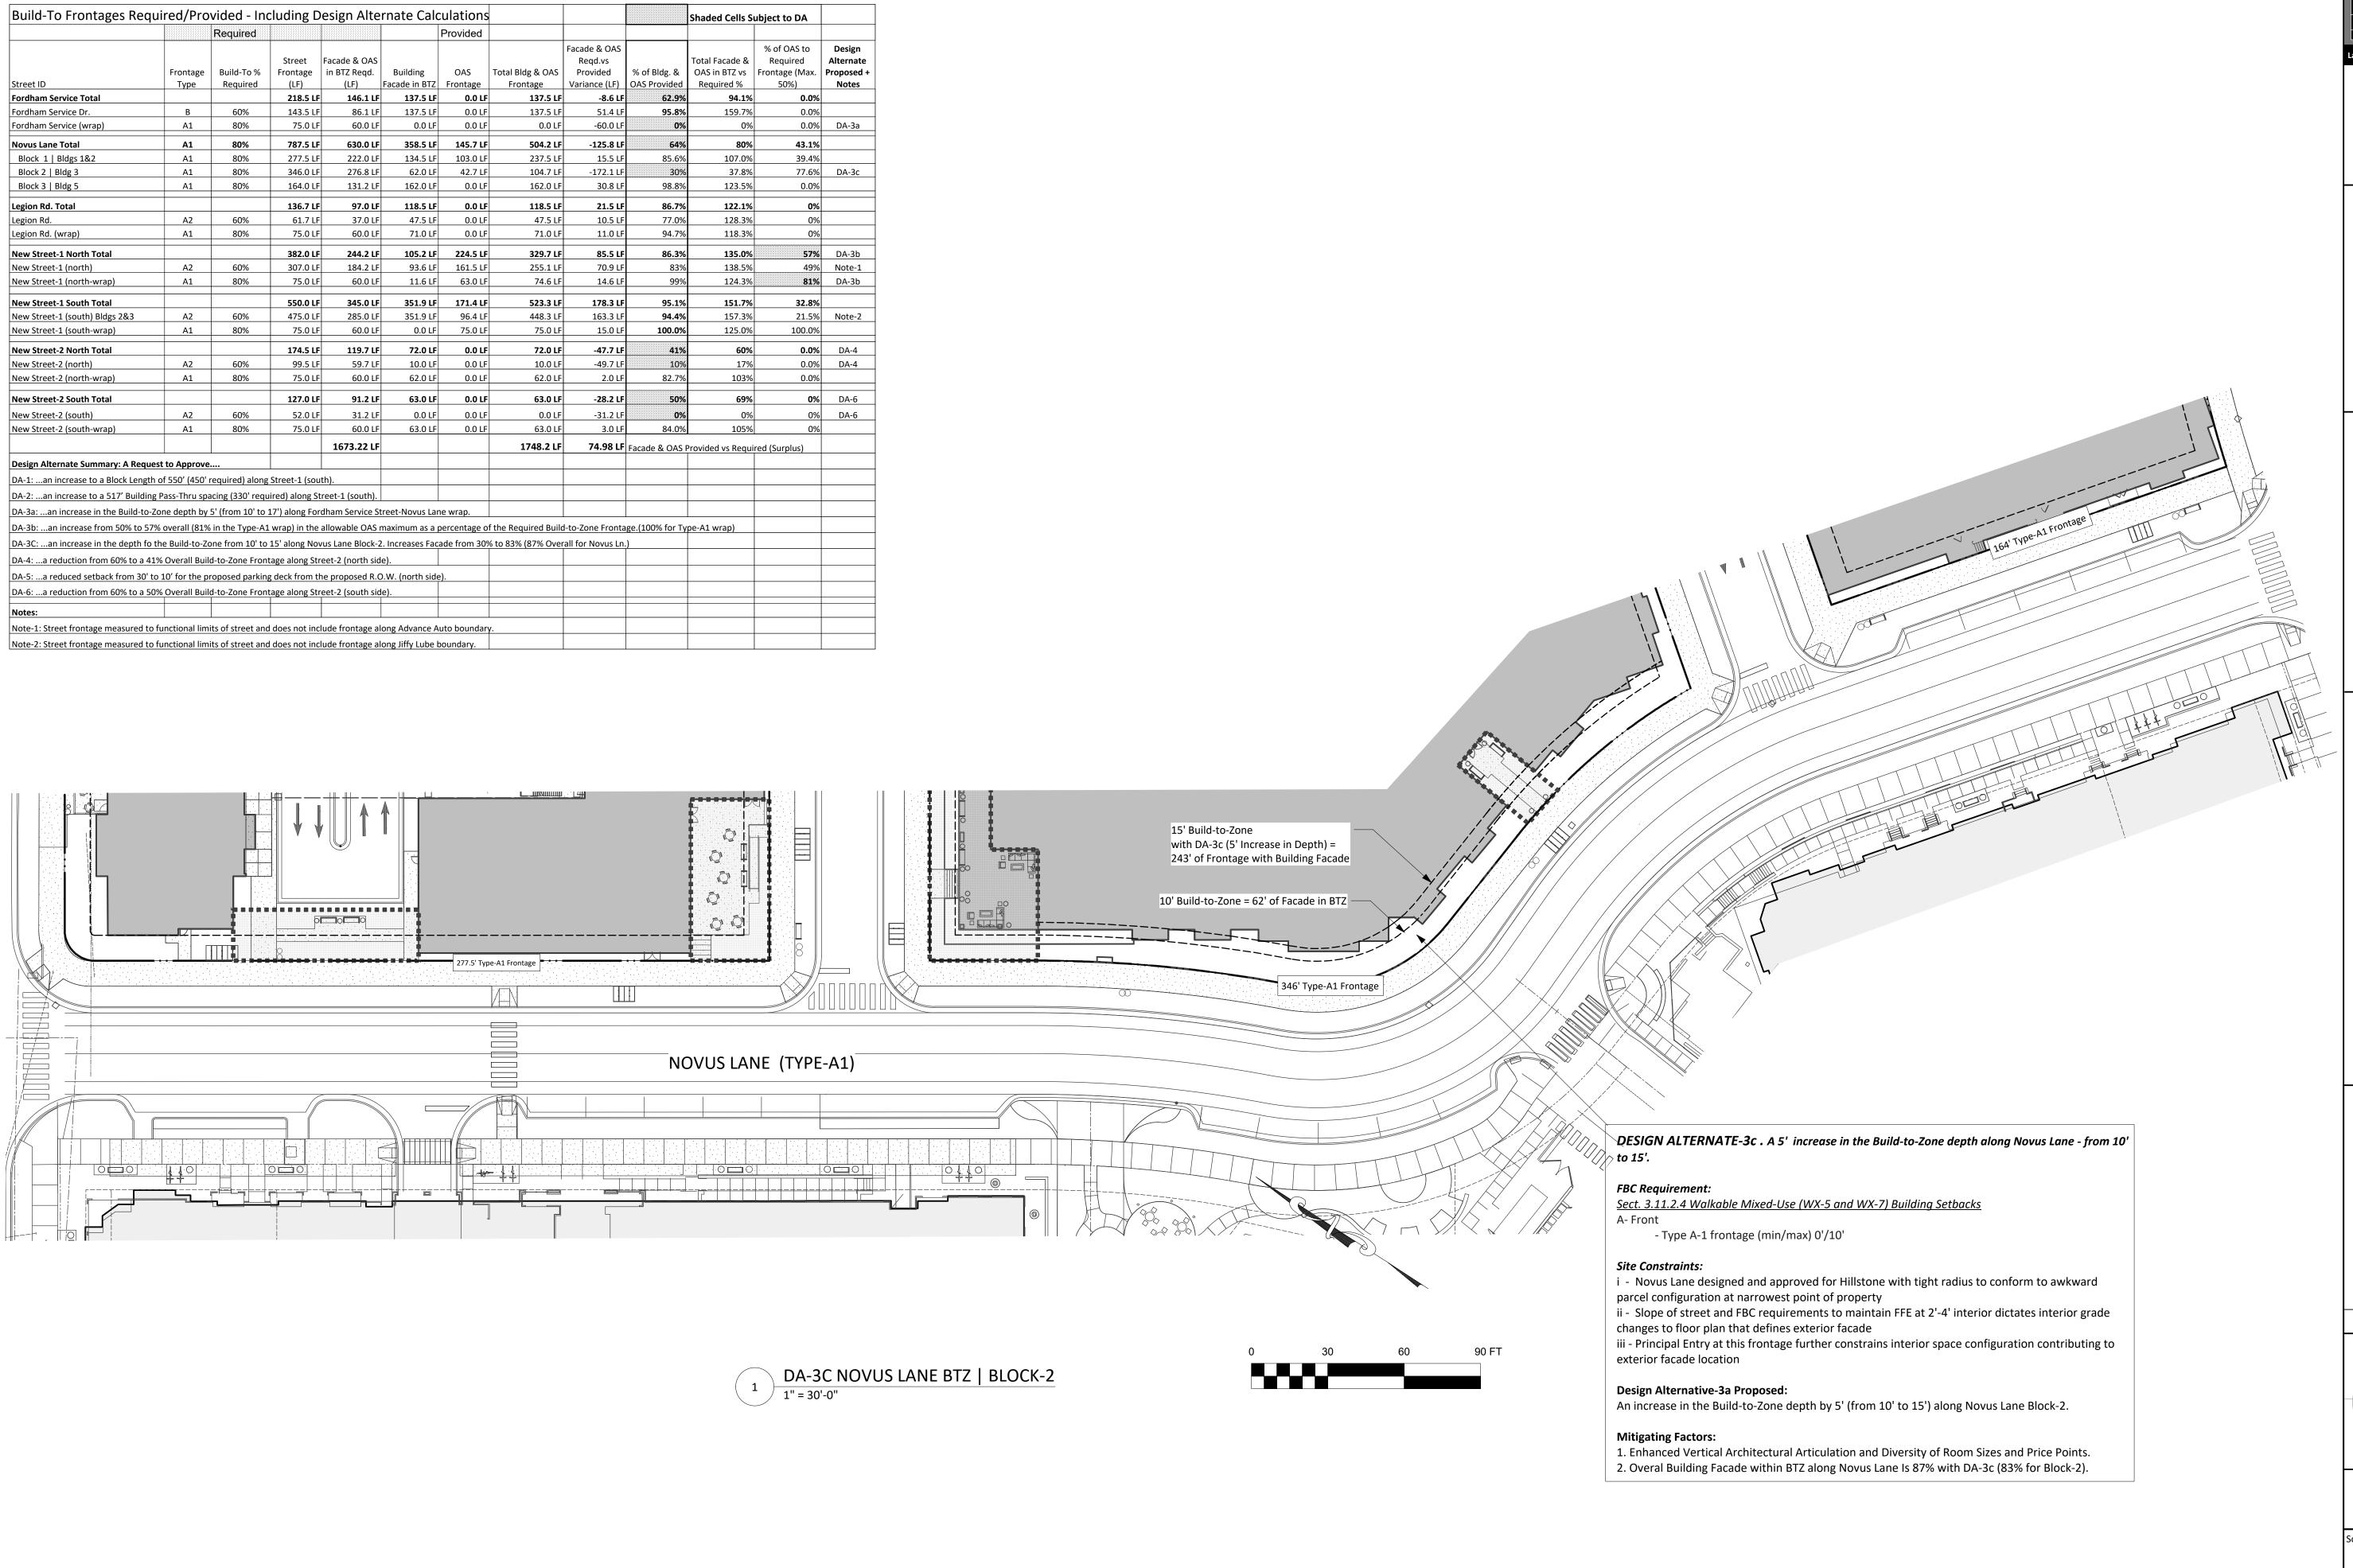



Scott Murray Land Planning, Inc. 1450 Environ Way Chapel Hill, NC 27517 274 Botetourt Ct. Boydton, VA 23917 252-213-9501 434-689-2925 (fax) www. stmlandplan.com smurray@stmlandplan.com

Project:

Tarheel Lodging Redevelopment

Chapel Hill, North Carolina

Developer:

Tarheel Lodging, LLC and Unicorn Group Fifteen, LLC

> 6110 Falconbridge Rd. ste. 200 Chapel Hill, North Carolina 27517

Sheet Title::

Design Alternate 3c

No. Date: Issue Notes:

NOT FOR

CONSTRUCTION

Copyright (c) by Scott Murray Land Planning, Inc. All Rights Reserved. Reuse of the material on these plans without prior written authorization is expressly prohibited.

as shown

Date:
 July 20, 2018

Drawn By:
 STM

CS7303

STM
Drawing No.:

Build-To Frontages Requi	irea/Pro		Juaing D	esign Aite	mate Car					Shaded Cells S	ubject to DA	
		Required				Provided						
Street ID	Frontage Type	Build-To % Required	Street Frontage (LF)	Facade & OAS in BTZ Reqd. (LF)	Building Facade in BTZ	OAS Frontage	Total Bldg & OAS Frontage	Facade & OAS Reqd.vs Provided Variance (LF)	% of Bldg. & OAS Provided	Total Facade & OAS in BTZ vs Required %	% of OAS to Required Frontage (Max. 50%)	Design Alternat Proposed Notes
Fordham Service Total			218.5 LF	146.1 LF	137.5 LF		137.5 LF	-8.6 LF	62.9%	94.1%	0.0%	
Fordham Service Dr.	В	60%	143.5 LF	86.1 LF	137.5 LF	0.0 LF	137.5 LF	51.4 LF	95.8%	159.7%	0.0%)
Fordham Service (wrap)	A1	80%	75.0 LF	60.0 LF	0.0 LF	0.0 LF	0.0 LF	-60.0 LF	0%	0%	0.0%	DA-3a
Novus Lane Total	A1	80%	787.5 LF	630.0 LF	358.5 LF	145.7 LF	504.2 LF	-125.8 LF	64%	80%	43.1%	
Block 1 Bldgs 1&2	A1	80%	277.5 LF	222.0 LF	134.5 LF	103.0 LF	237.5 LF	15.5 LF	85.6%	107.0%	39.4%)
Block 2 Bldg 3	A1	80%	346.0 LF	276.8 LF	62.0 LF	42.7 LF	104.7 LF	-172.1 LF	30%	37.8%	77.6%	DA-3c
Block 3 Bldg 5	A1	80%	164.0 LF	131.2 LF	162.0 LF	0.0 LF	162.0 LF	30.8 LF	98.8%	123.5%	0.0%	,
Legion Rd. Total			136.7 LF	97.0 LF	118.5 LF	0.0 LF	118.5 LF	21.5 LF	86.7%	122.1%	0%	
Legion Rd.	A2	60%	61.7 LF	37.0 LF	47.5 LF	0.0 LF	47.5 LF	10.5 LF	77.0%	128.3%	0%	,
Legion Rd. (wrap)	A1	80%	75.0 LF	60.0 LF	71.0 LF	0.0 LF	71.0 LF	11.0 LF	94.7%	118.3%	0%	,
New Street-1 North Total			382.0 LF	244.2 LF	105.2 LF	224.5 LF	329.7 LF	85.5 LF	86.3%	135.0%	57%	DA-3b
New Street-1 (north)	A2	60%	307.0 LF	184.2 LF	93.6 LF	161.5 LF	255.1 LF	70.9 LF		138.5%		
New Street-1 (north-wrap)	A1	80%	75.0 LF	60.0 LF	11.6 LF	63.0 LF	74.6 LF	14.6 LF	99%	124.3%	81%	DA-3b
New Street-1 South Total			550.0 LF	345.0 LF	351.9 LF	171.4 LF	523.3 LF	178.3 LF	95.1%	151.7%	32.8%	
New Street-1 (south) Bldgs 2&3	A2	60%	475.0 LF	285.0 LF	351.9 LF	96.4 LF	448.3 LF	163.3 LF	94.4%	157.3%		
New Street-1 (south-wrap)	A1	80%	75.0 LF	60.0 LF	0.0 LF	75.0 LF	75.0 LF	15.0 LF		125.0%		
New Street-2 North Total			174.5 LF	119.7 LF	72.0 LF	0.0 LF	72.0 LF	-47.7 LF	41%	60%	0.0%	DA-4
New Street-2 (north)	A2	60%	99.5 LF	59.7 LF	10.0 LF	0.0 LF	10.0 LF	-49.7 LF	10%	17%		
New Street-2 (north-wrap)	A1	80%	75.0 LF	60.0 LF	62.0 LF	0.0 LF	62.0 LF	2.0 LF	82.7%	103%	0.0%	,
New Street-2 South Total			127.0 LF	91.2 LF	63.0 LF	0.0 LF	63.0 LF	-28.2 LF	50%	69%	0%	DA-6
New Street-2 (south)	A2	60%	52.0 LF	31.2 LF	0.0 LF	0.0 LF	0.0 LF	-31.2 LF	0%			
New Street-2 (south-wrap)	A1	80%	75.0 LF	60.0 LF	63.0 LF	0.0 LF	63.0 LF	3.0 LF		1		
				1673.22 LF			1748.2 LF	74.98 LF	Facade & OAS	Provided vs Requ	ired (Surplus)	
Design Alternate Summary: A Request	t to Approve	••••									(50. 6.0)	
DA-1:an increase to a Block Length of			Street-1 (sou	th).								
DA-2:an increase to a 517' Building F												
DA-3a:an increase in the Build-to-Zo					treet-Novus La	ne wrap.						
DA-3b:an increase from 50% to 57%							f the Required Build	d-to-Zone Fronta	ge.(100% for Tv	pe-A1 wrap)		
DA-3C:an increase in the depth fo th										,		
DA-4:a reduction from 60% to a 41%							,					
DA-5:a reduced setback from 30' to						e).						
DA-6:a reduction from 60% to a 50%	•			•	,	•						
Notes:												
Note-1: Street frontage measured to fu	ınctional lim	its of street and	does not inc	lude frontage a	Inna Advance A	uto houndar	ı					<u> </u>
INDIC-1. Direct Holliage Hieasuled to It	anchondi IIII	ונש טו שנו ככנ מווע	aues nut int	iuue ii oiitage d	IONE AUVAILLE	aro poningi	у.					

Design Alternate-5: Reduced setback for the proposed parking deck from the proposed R.O.W. (north side).

FBC Requirement:

Sect. 3.11.2.5 Frontages - Parking Location

Structured parking: 30' minimum behind front building facade for all floors

Site Constraints:

- ii Unusual Site Configuration and Circulation Limits Structured Parking Deck Placement and Ramping Opportunities
- iii Adjacent Parcel Use and Circulation Dictate Future Connection Alignment

Design Alternative-5: Allow a reduced setback from 30' to 10' for the proposed parking deck from the proposed R.O.W. (north side).

Mitigating Factors:

- 1. Align Street to Maximize Opportunity for Future Connection to Europa Drive, Provide Best Visibility and Minimize Slope of Future Connection
- 2. Minimize Impact to Steep Slopes,
- 3. Accommodate Needed Fire Access to Garage Parking and Turnaround Requirements
- 4. Position Parking Facilities and Circulation in Close Juxtaposition to Other Parking Structures

Design Alternate 4: A reduction from 60% to a 41% Overall Build-to-Zone Frontage

FBC Requirements:

Sect. 3.11.2.4 Build-to-Zone Type-A2 Street Build-to-Frontage on Type-A2 Streets = 60%


Site Constraints:

- i Existing Vegetated Buffer
- ii Steep Slopes
- iii Unusual Site Configuration and Adjoining Intersection Spacing and Circulation Street Alignment Restricted Due to Intersection

iv - No Other Means of Ingress/Egress to Garage for Fire

Design Alternative-4: Allow a reduction from 60% to a 41% Overall Build-to-Zone Frontage along Street-2 (north side).

- 1. Align Street to Accommodate Novus Ln. Intersection Offset,
- 2. Maximize Opportunity for Future Connection to Europa Drive and Offset Parking Garage Entrance,
- 3. Minimize Impact to Existing Vegetated Buffer and Steep Slopes,
- 4. Provide for Essential Fire Access to Garage Parking and Turnaround Requirements.

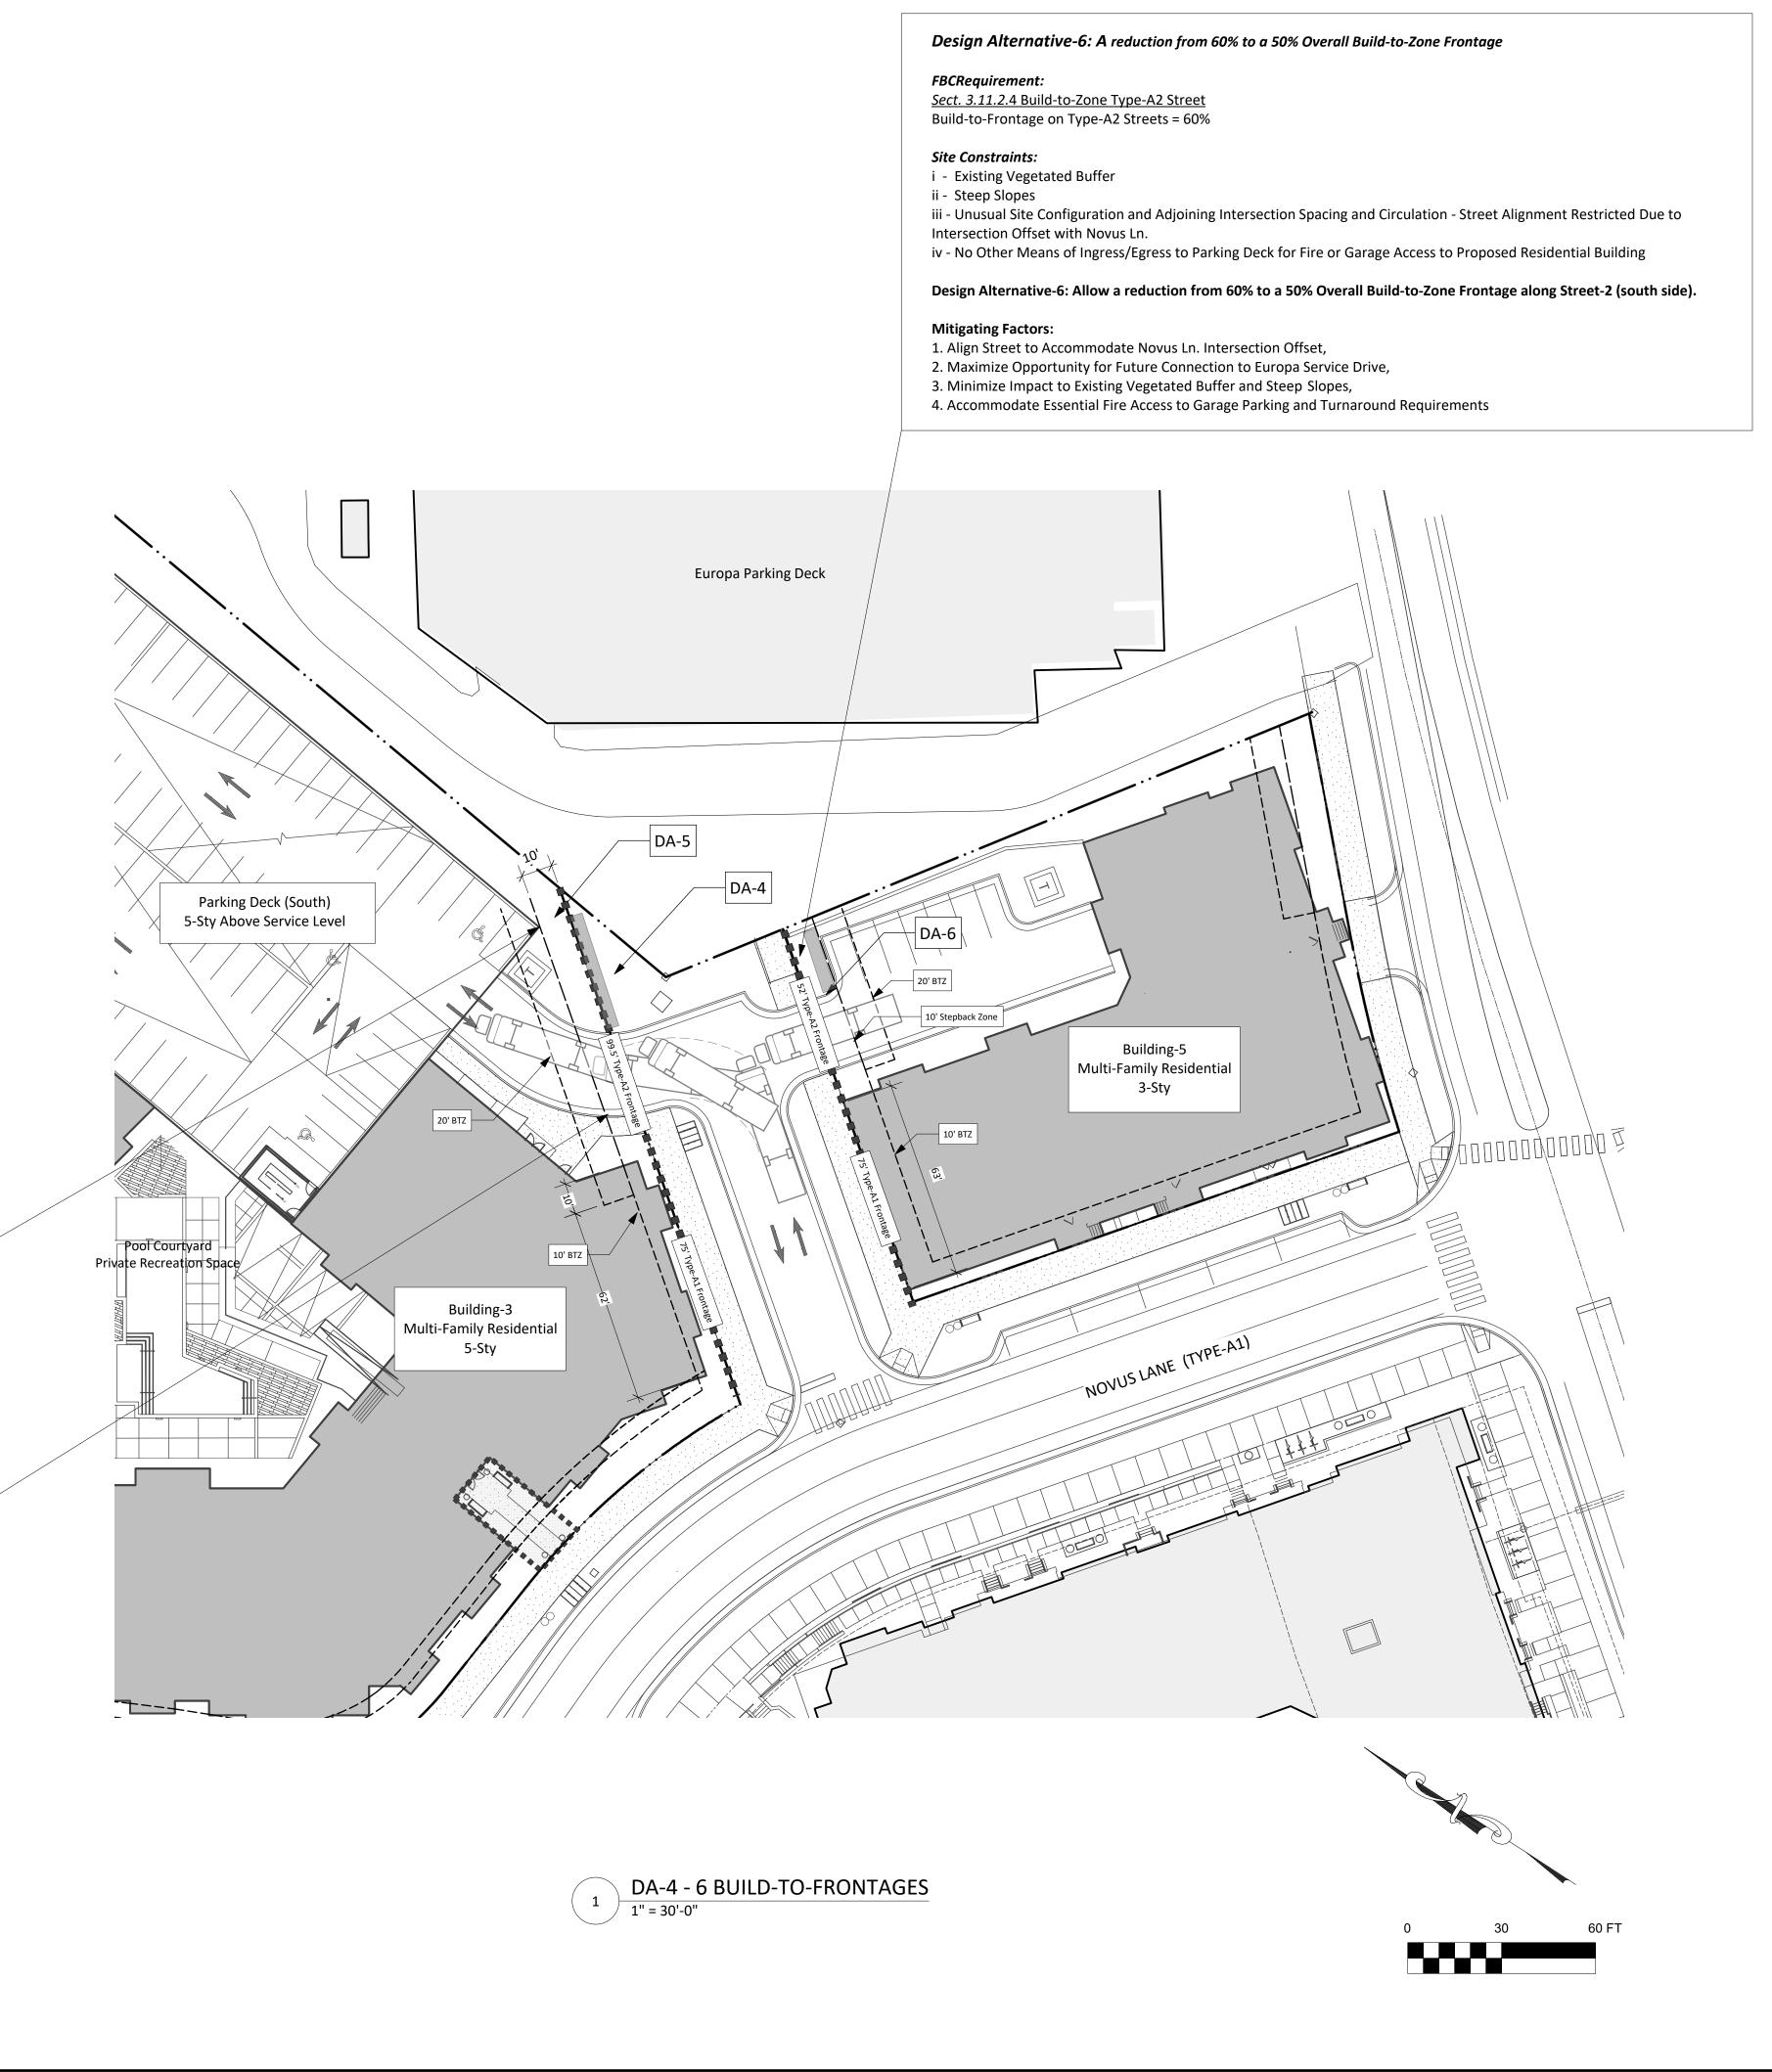



Scott Murray Land Planning, Inc. 1450 Environ Way Chapel Hill, NC 27517 274 Botetourt Ct. Boydton, VA 23917 252-213-9501 434-689-2925 (fax) www. stmlandplan.com smurray@stmlandplan.com

Project:

Tarheel Lodging Redevelopment Chapel Hill, North Carolina

Developer:

Tarheel Lodging, LLC and Unicorn Group Fifteen, LLC

> 6110 Falconbridge Rd. ste. 200 Chapel Hill, North Carolina 27517

Sheet Title::

Design **Alternates** 4, 5 & 6

NOT FOR CONSTRUCTION

Copyright (c) by Scott Murray Land Planning, Inc. All Rights Reserved. Reuse of the material on these plans without prior written authorization is expressly prohibited.

as shown July 9, 2018 CS7304 Drawn By: STM Drawing No.:

No. Date: Issue Notes: